


Site Authenticate Routes

- [How to delete Authenticate Routes Info through the cloudpanzer mobile?](#)
- [How to manage Authenticate Routes on site through the cloudpanzer website?](#)


How to delete Authenticate Routes Info through the cloudpanzer mobile?

Follow the steps below to Site Authenticate Routes Navigation.


1: Once logged in, look for a "Server" and click on it.

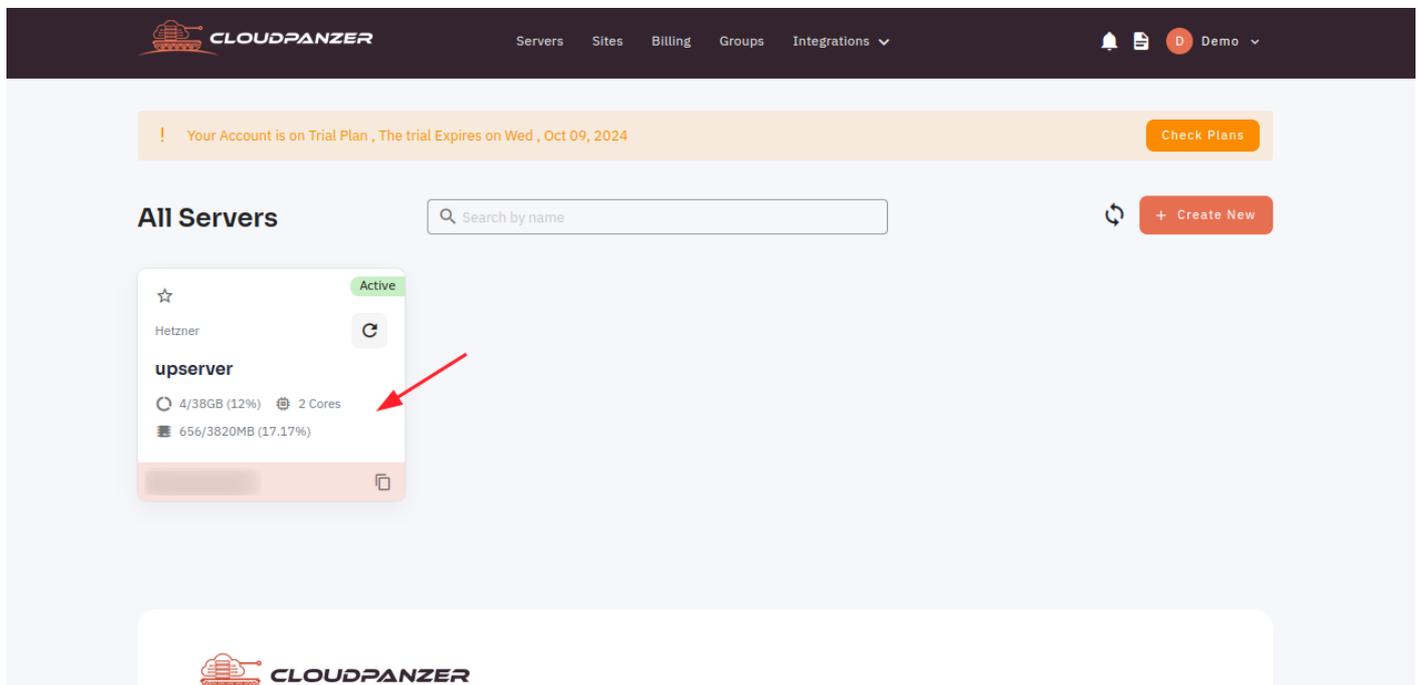


2. Click on the Site option and Select an Active Site.

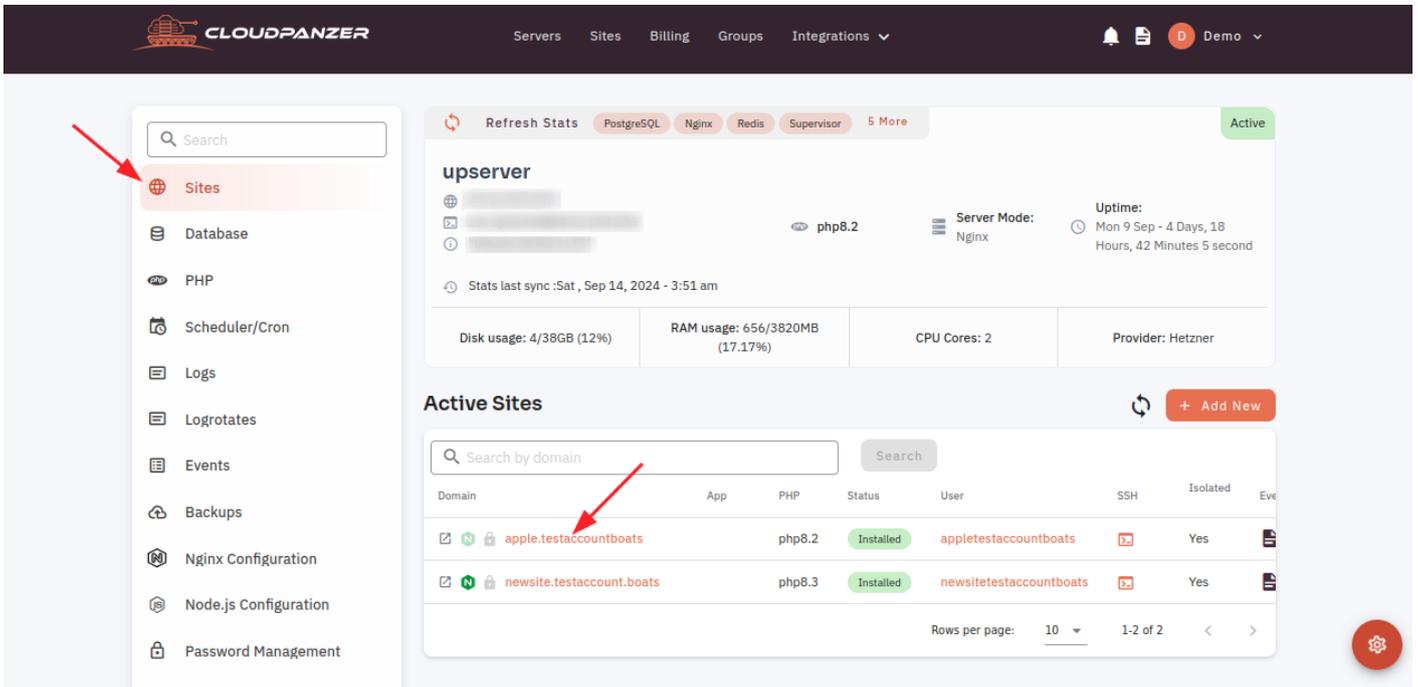


3. Click on the Authenticate Routes Option.

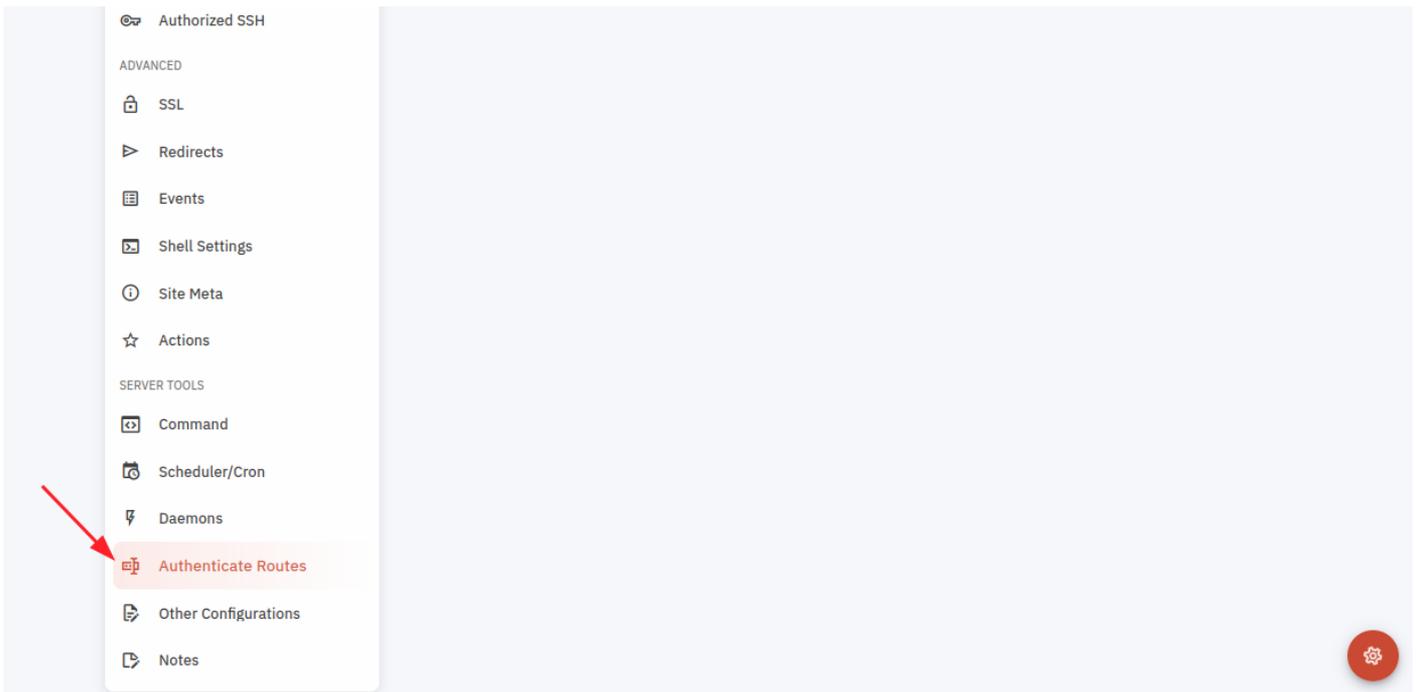

4. Click on the Delete icon.

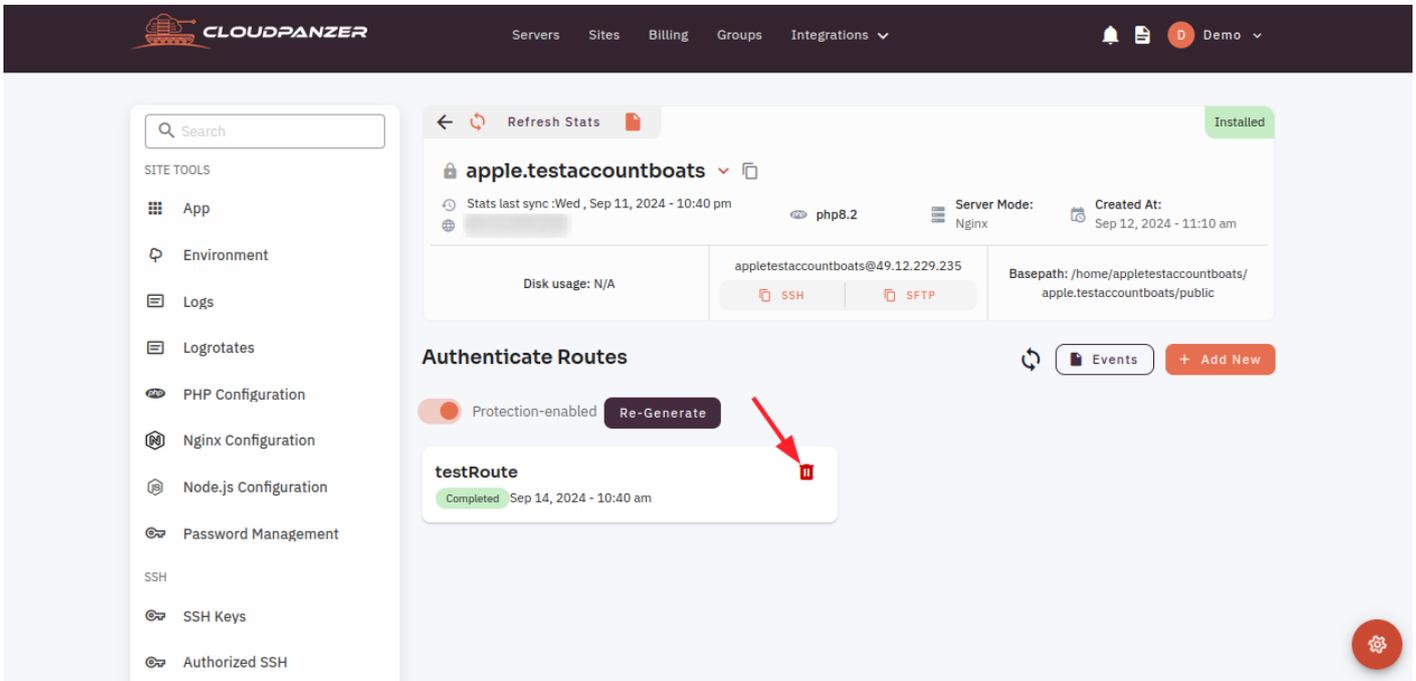

5. Click on the yes button.

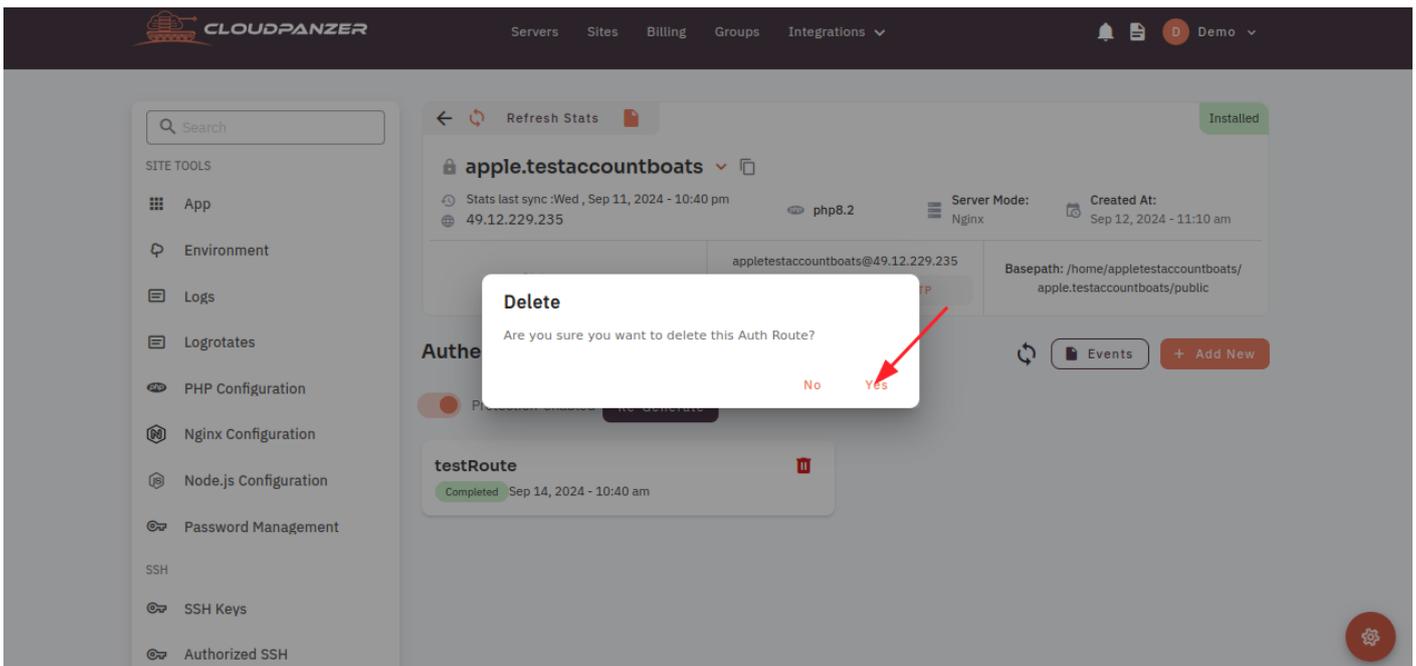

Here, you can see that Authenticate Routes were deleted successfully.

🔍 Search

SITE TOOLS

- 🗄️ App
- 🔄 Environment
- 📄 Logs
- 📄 Logrotates
- 🗣️ PHP Configuration
- 🔧 Nginx Configuration
- 🔧 Node.js Configuration
- 🔑 Password Management
- SSH
- 🔑 SSH Keys
- 🔑 Authorized SSH

🔄 Refresh Stats

Installed

🔒 apple.testaccountboats

🕒 Stats last sync: Wed, Sep 11, 2024 - 10:40 pm

🖥️ php8.2

📄 Server Mode: Nginx

📅 Created At: Sep 12, 2024 - 11:10 am

Disk usage: N/A

appletestaccountboats@49.12.229.235

🔑 SSH

📁 SFTP

Basepath: /home/appletestaccountboats/apple.testaccountboats/public

Authenticate Routes



📄 Events

+ Add New

🔴 Protection-enabled

Re-Generate

testRoute

🗑️ Deleting Sep 14, 2024 - 10:40 am

Request Submitted, This will take a few seconds to process


Close



How to manage Authenticate Routes on site through the cloudpanzer website?

Follow the steps below to Site Authenticate Routes Navigation.

1: Once logged in, look for a "Server" and click on it.

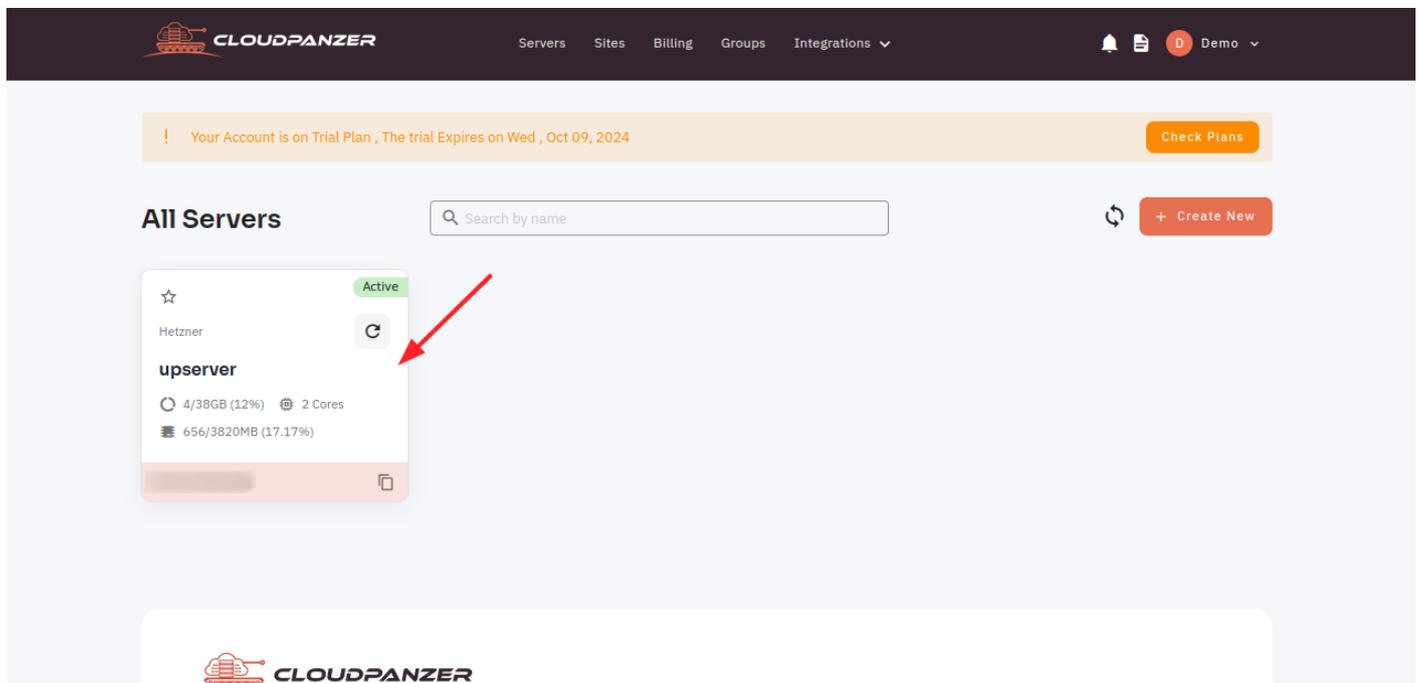

2. Click on the Site option and Select an Active Site.


The screenshot shows the Cloudpanzer dashboard. On the left, a sidebar menu has 'Sites' highlighted with a red arrow. The main content area displays the 'upserver' status, including server mode (Nginx), uptime, and resource usage. Below this, the 'Active Sites' section features a search bar and a table of installed sites. A red arrow points to the search bar in the 'Active Sites' section.

Domain	App	PHP	Status	User	SSH	Isolated	Ev
apple.testaccountboats		php8.2	Installed	appletestaccountboats		Yes	
newsite.testaccount.boats		php8.3	Installed	newsitetestaccountboats		Yes	


3. Click on the Authenticate Routes Option.

The screenshot shows the configuration menu in Cloudpanzer. The 'Authenticate Routes' option is highlighted with a red arrow. Other options include Authorized SSH, SSL, Redirects, Events, Shell Settings, Site Meta, Actions, Command, Scheduler/Cron, Daemons, Other Configurations, and Notes.


4. Click on the Switch button to enable Protection.

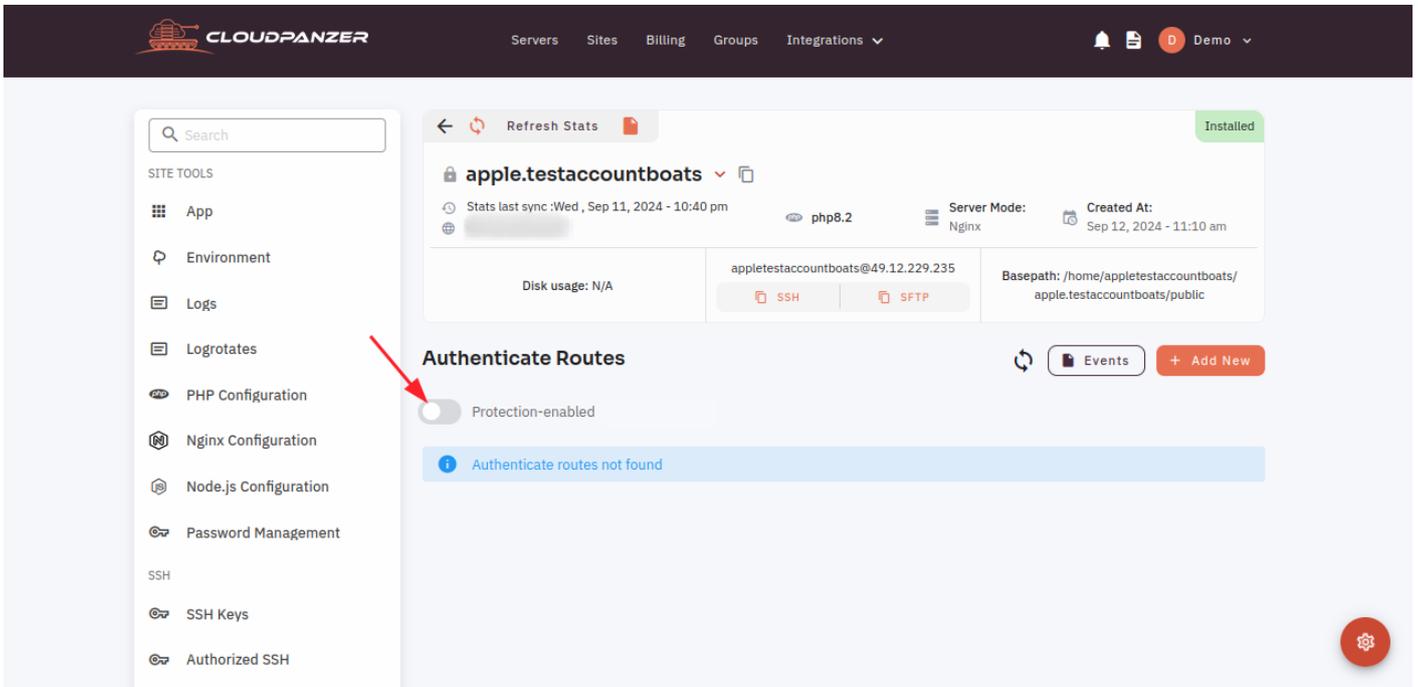


Here, you can see protection enabled successfully.

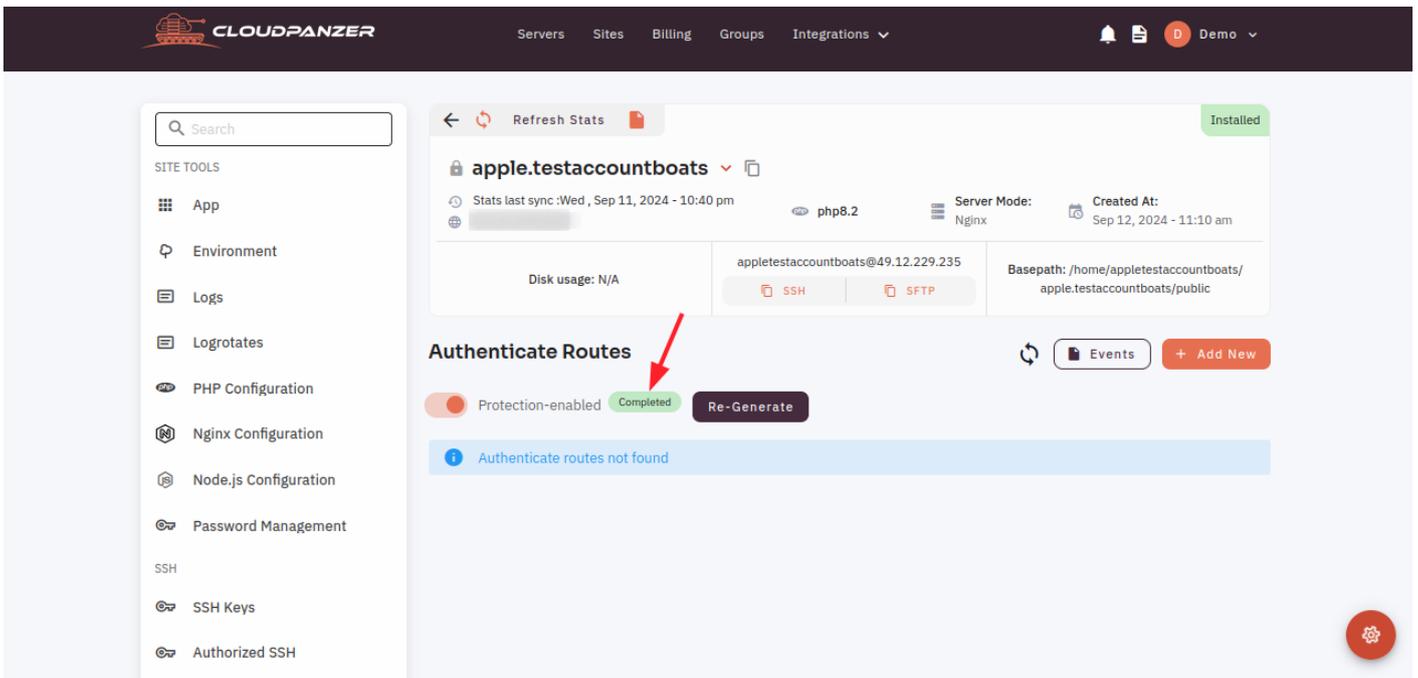


5. Click on the Event button.

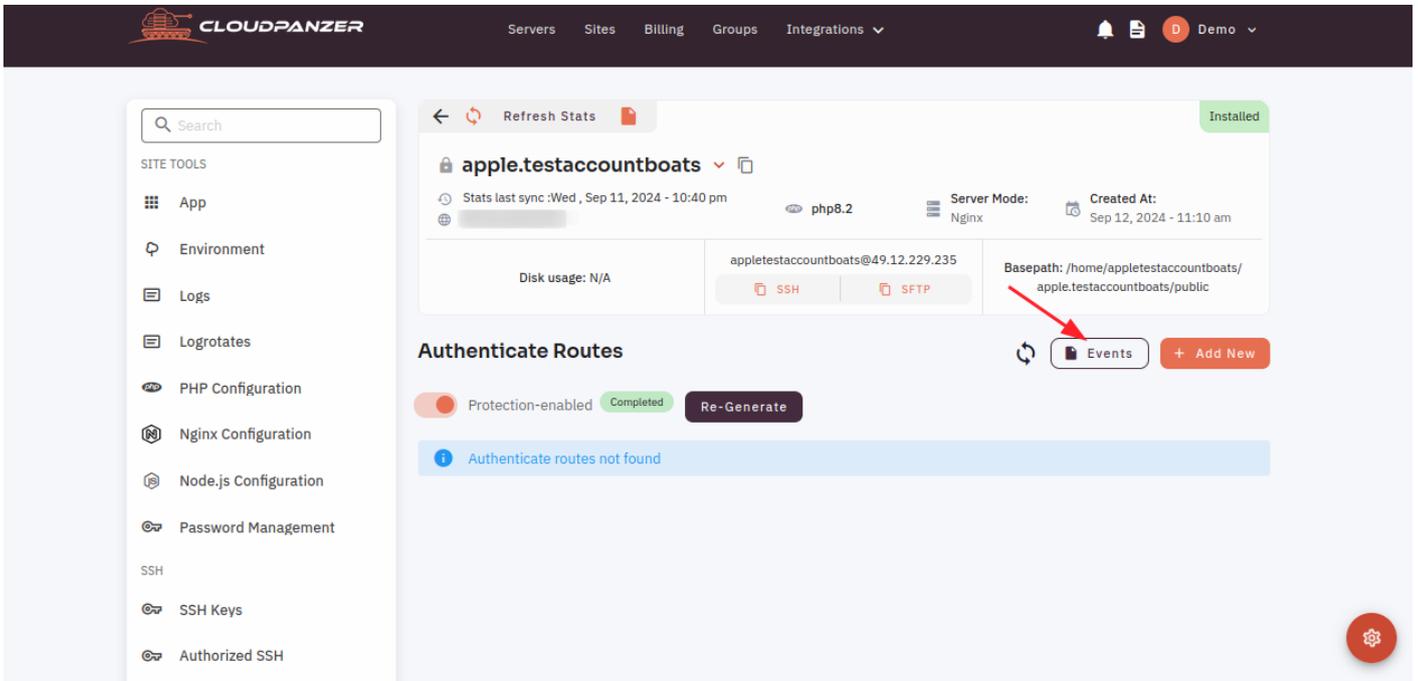


6. Click on the Eye icon.

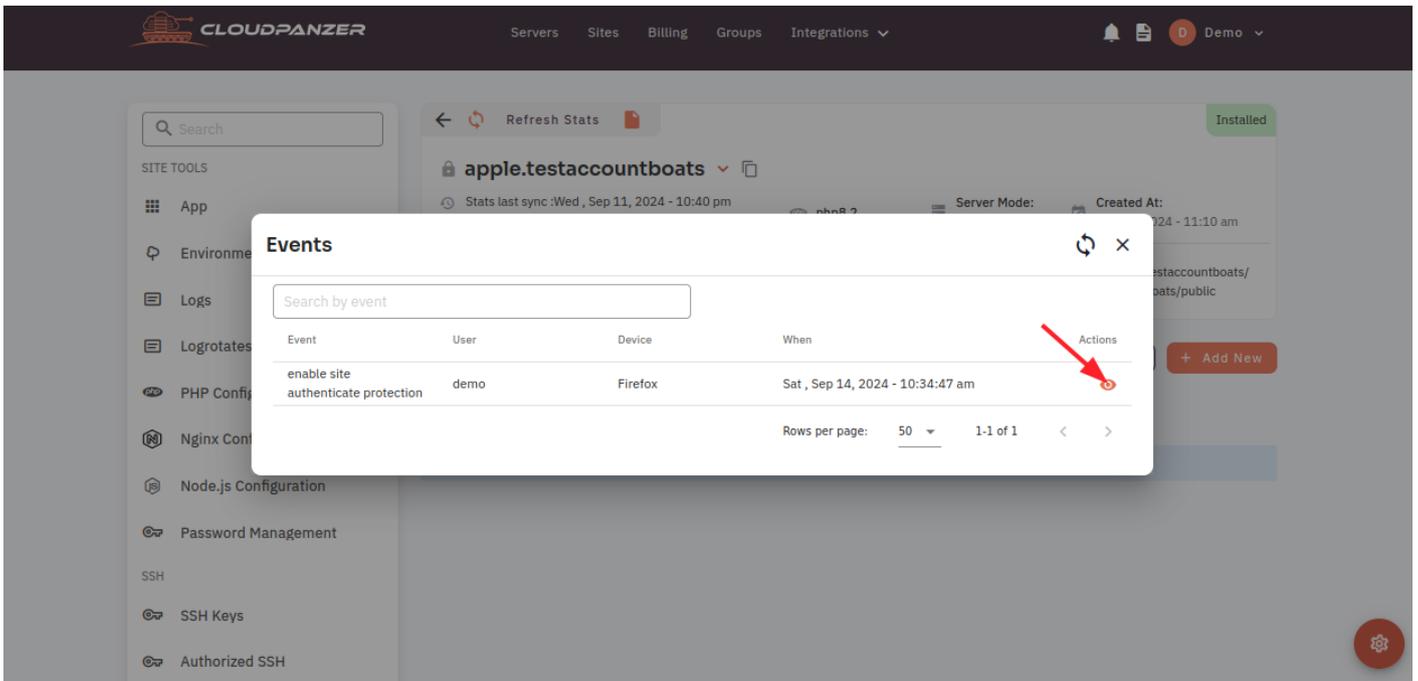


7. Click on the file icon.

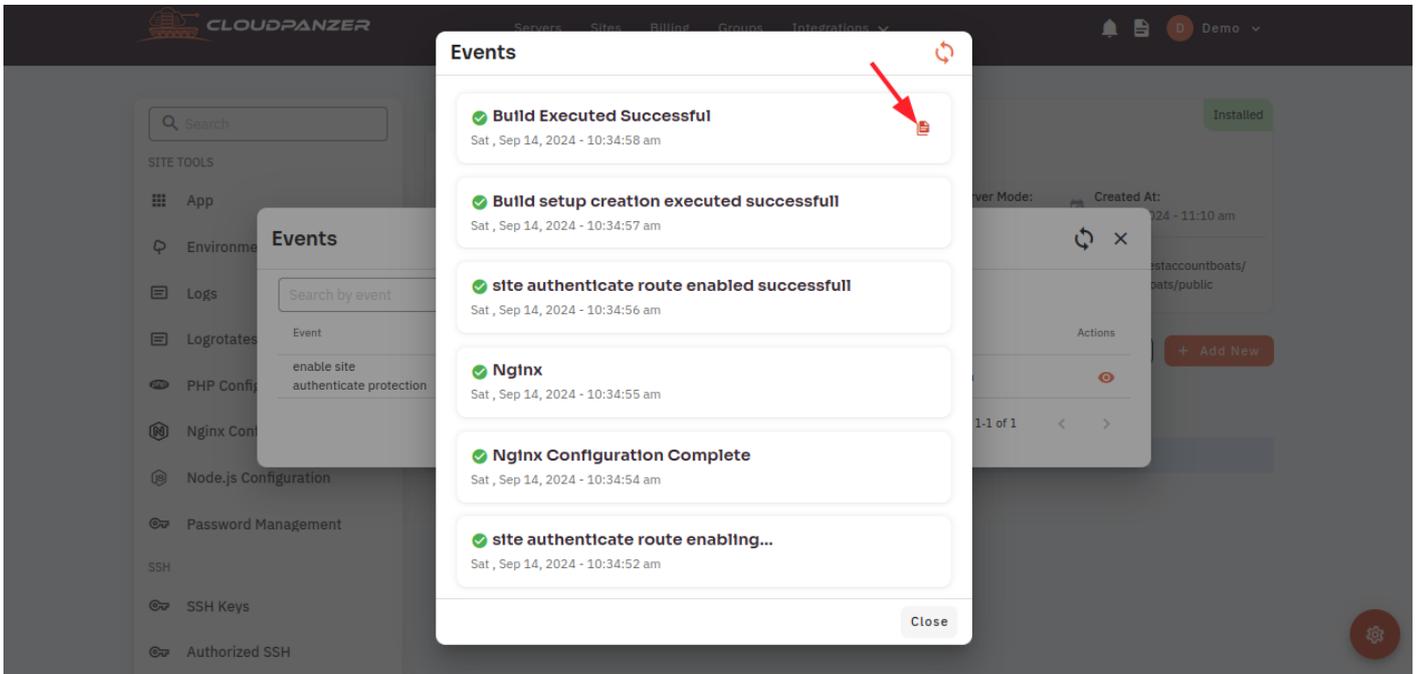


Here, you can see that Event Data.

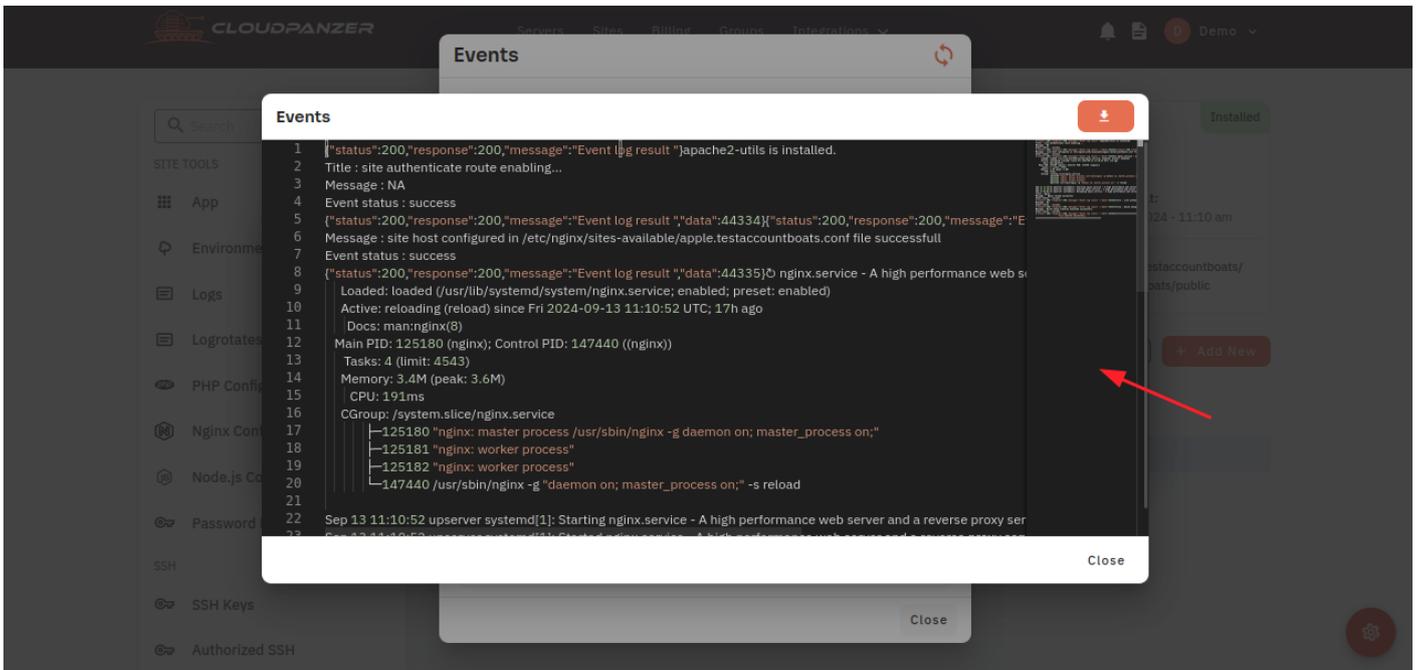

8. Click on the Add New Button.

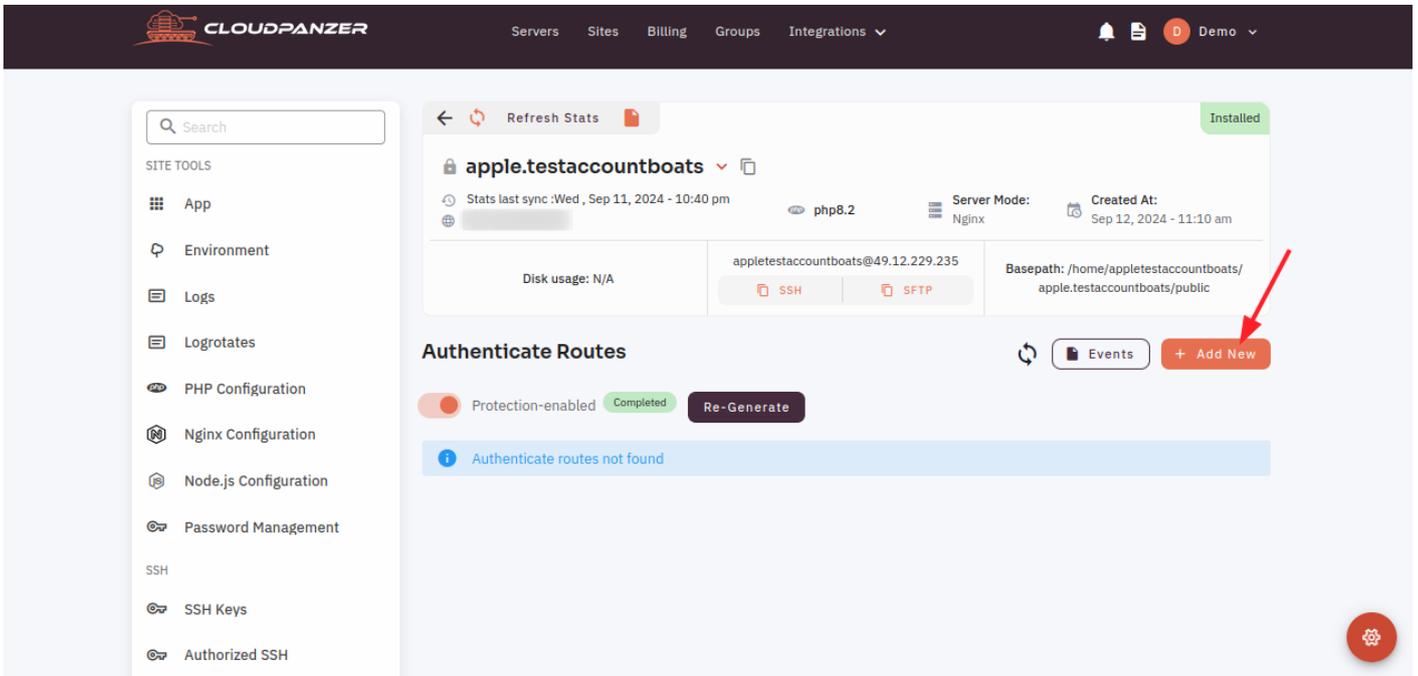

9. Fill in the Fields and click on Save Button.

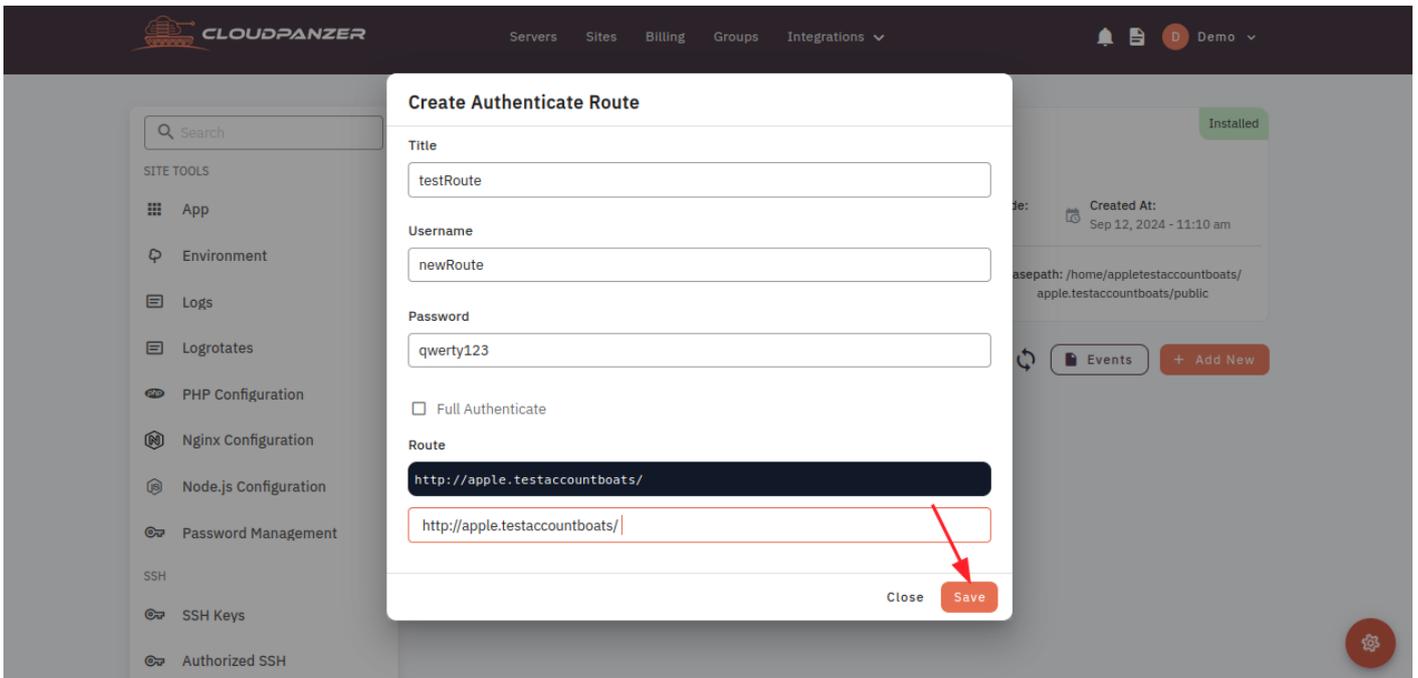

Here, you can see the Authenticate Routes Created Successfully.

- 🔍 Search
- SITE TOOLS
- 🗄 App
- 🔄 Environment
- 📄 Logs
- 📄 Logrotates
- 🔧 PHP Configuration
- 🔧 Nginx Configuration
- 🔧 Node.js Configuration
- 🔑 Password Management
- SSH
- 🔑 SSH Keys
- 🔑 Authorized SSH

← Refresh Stats Refresh Stats Installed

🔒 apple.testaccountboats 📄

🕒 Stats last sync: Wed, Sep 11, 2024 - 10:40 pm 🌐 php8.2 📄 Server Mode: Nginx 📅 Created At: Sep 12, 2024 - 11:10 am

Disk usage: N/A appletestaccountboats@49.12.229.235 Basepath: /home/appletestaccountboats/apple.testaccountboats/public

🔑 SSH 🔑 SFTP

Authenticate Routes

🔄 📄 Events + Add New

🔴 Protection-enabled Completed Re-Generate

testRoute 🗑

Completed Sep 14, 2024 - 10:40 am

