

How to add new Shell Aliases Group on site in CloudPanzer?

Shell alias groups are used to organize related command shortcuts (aliases) in a shell environment. They enhance organization, readability, and efficiency by categorizing commands, improving access to specific tools, and reducing naming conflicts. Alias groups streamline workflows, support customization, and promote collaboration in team environments. They make maintenance easier and facilitate quick transitions between different task contexts, contributing to a more structured and productive command-line experience.

Follow the steps below to add Shell Aliases

Navigate to the Shell Aliases

Use this link to view How to Navigate

4. Click on the Groups tab.

Shell Type

☐ SH ☒ Bash

☐ Force Reset config files

Save

Basic Advance **Groups**

File: /home/cptest104/.bash_aliases

Shell Aliases

Add New

Key	Value	Status	Actions
nrs	npm run serve	Finished	
pas	php artisan serve	Finished	
new	new val	Finished	
cu	composer update	Finished	

Rows per page: 10 1-4 of 4

5. Click on the Add New Button.

Shell Type

☐ SH ☒ Bash

☐ Force Reset config files

Save


Basic Advance **Groups**

Shell Aliases Groups


Add New

Group Name	Actions
php group	
Testing Group	
alias groups test	
Testing Alias group	
hello	
test alias group	
new Shell Aliases	
newGP	

6. Enter the Group name and then click on the Save button.

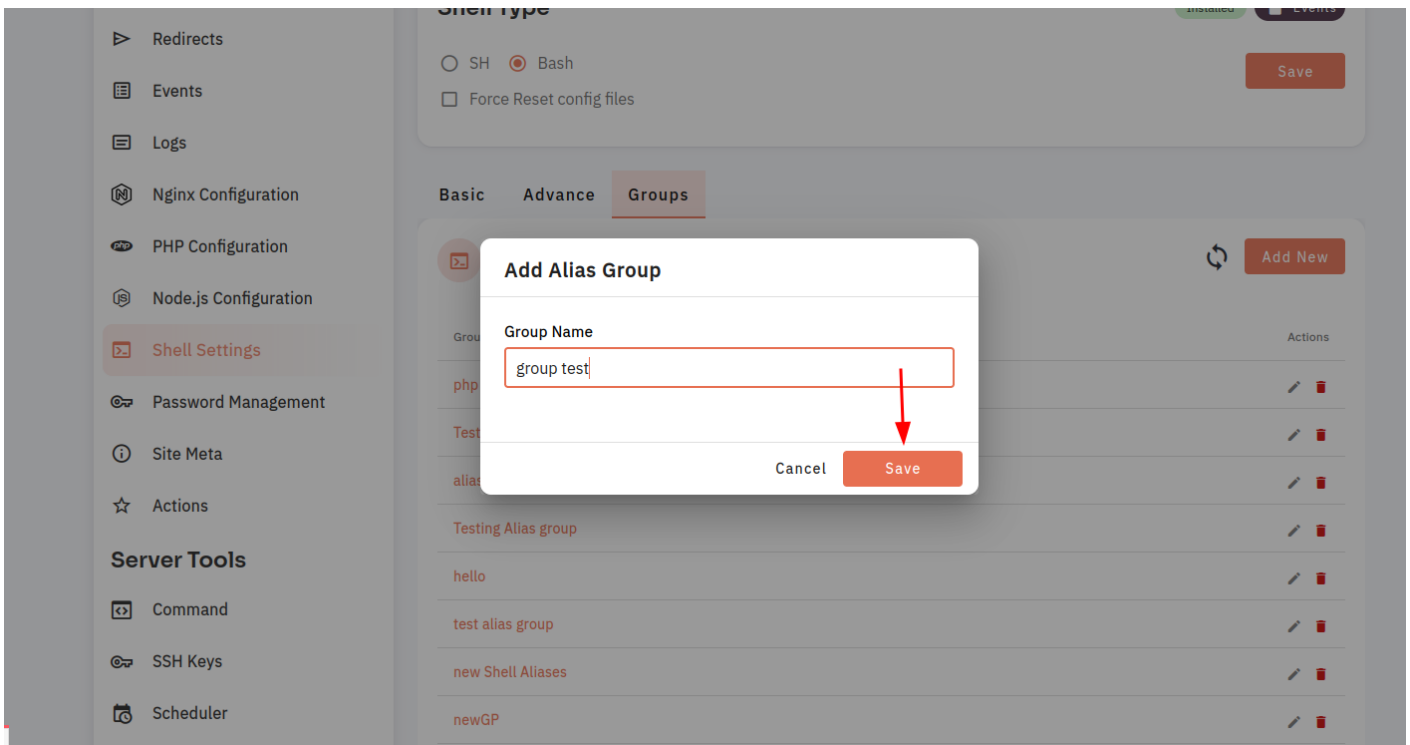

7. Here, you can see that the group added successfully.

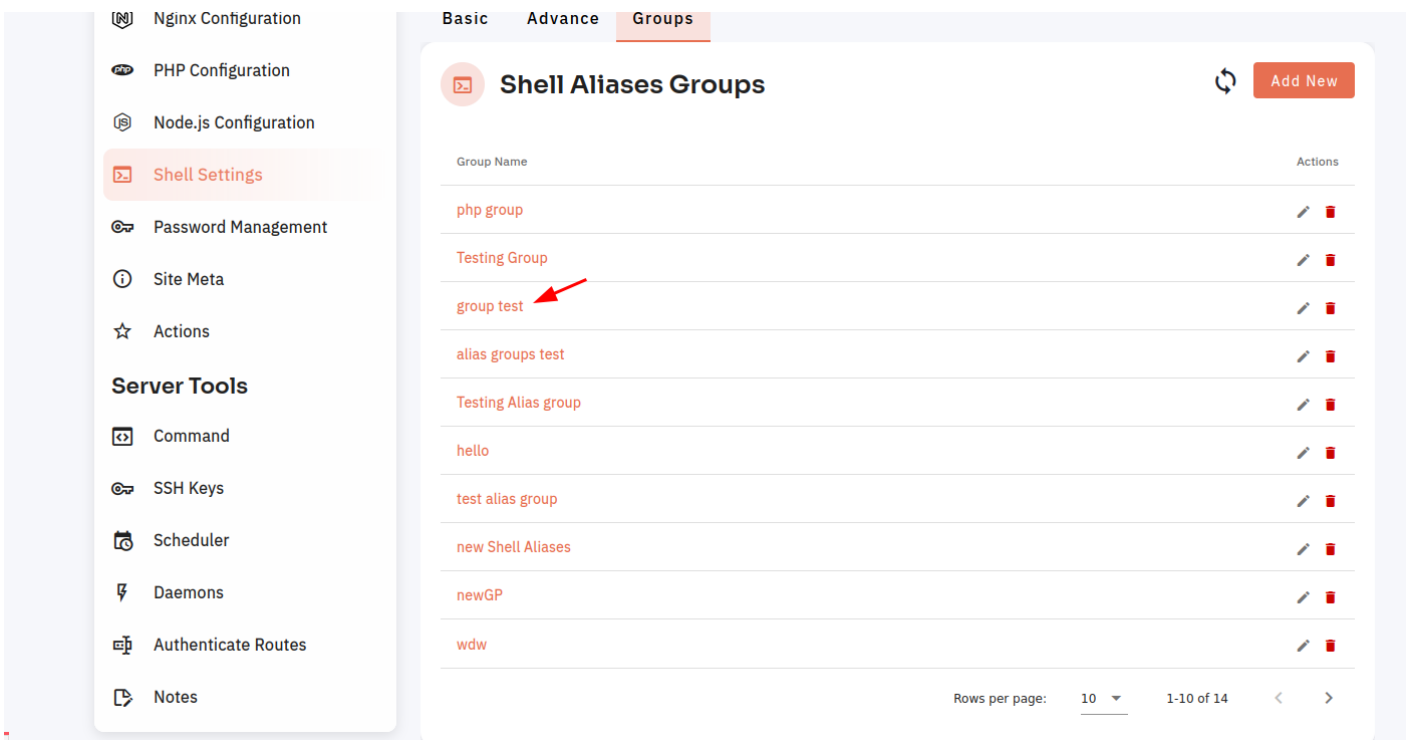

Revision #2

Created 23 August 2023 12:10:16 by Admin

Updated 2 September 2023 07:14:28 by Admin