


# How to configure Apache Software through the cloudpanzer website?


Testing, starting, and restarting the Apache HTTP Server software involves using commands to manage its operations.

Follow the steps below to configure Apache Software.


1: Once logged in, look for a "Server" and click on it.

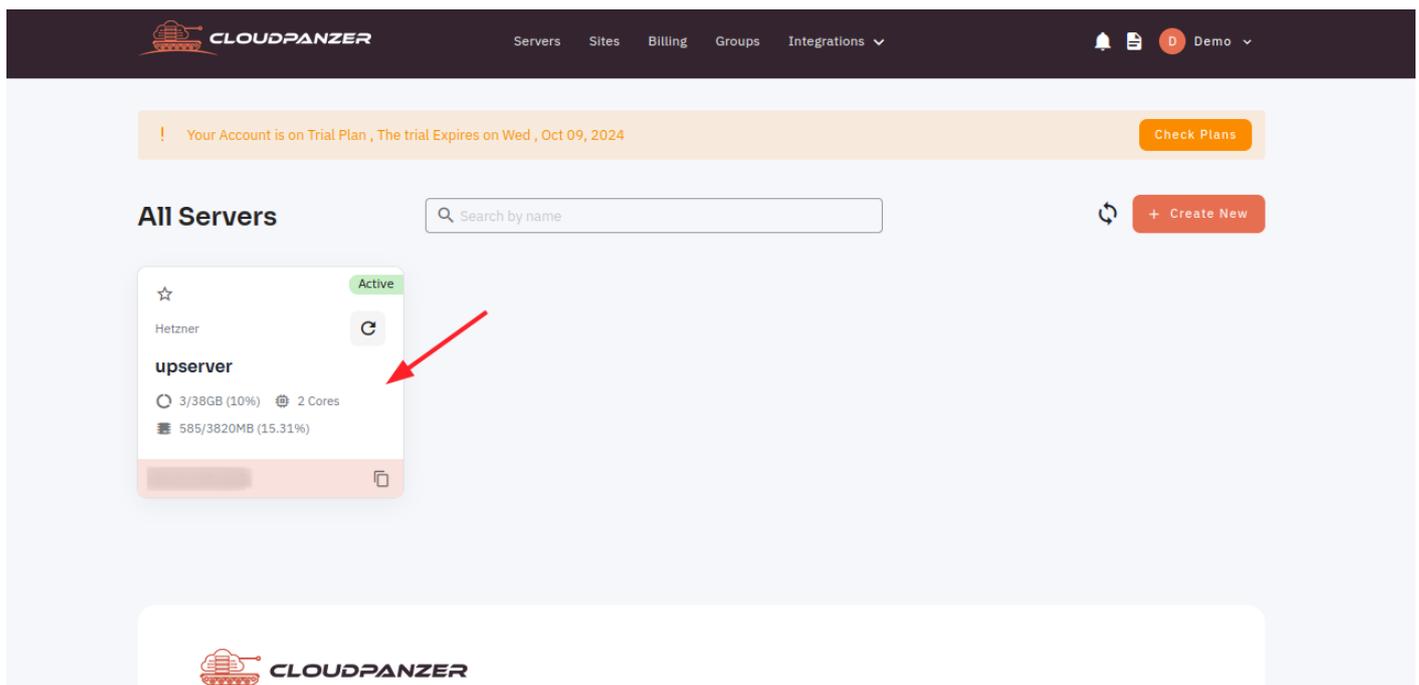


2. Select the Software Option.

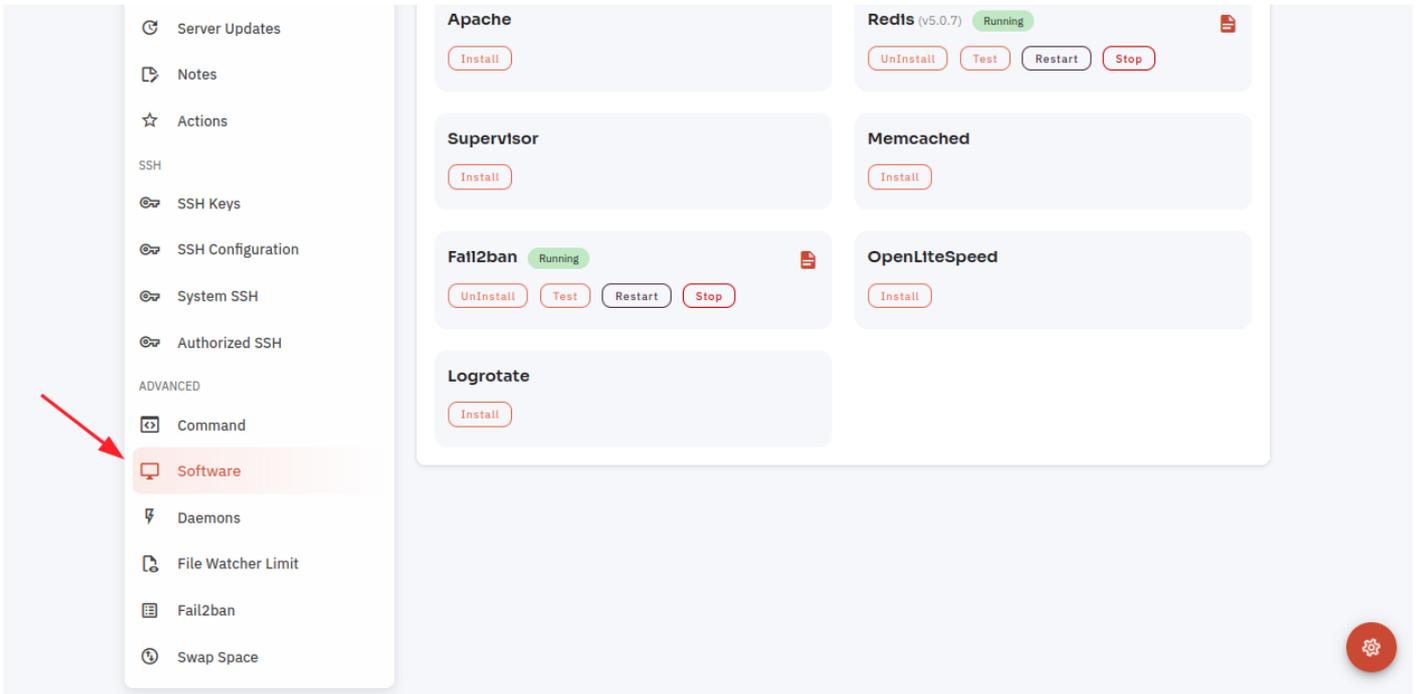


3. Select Test Option.

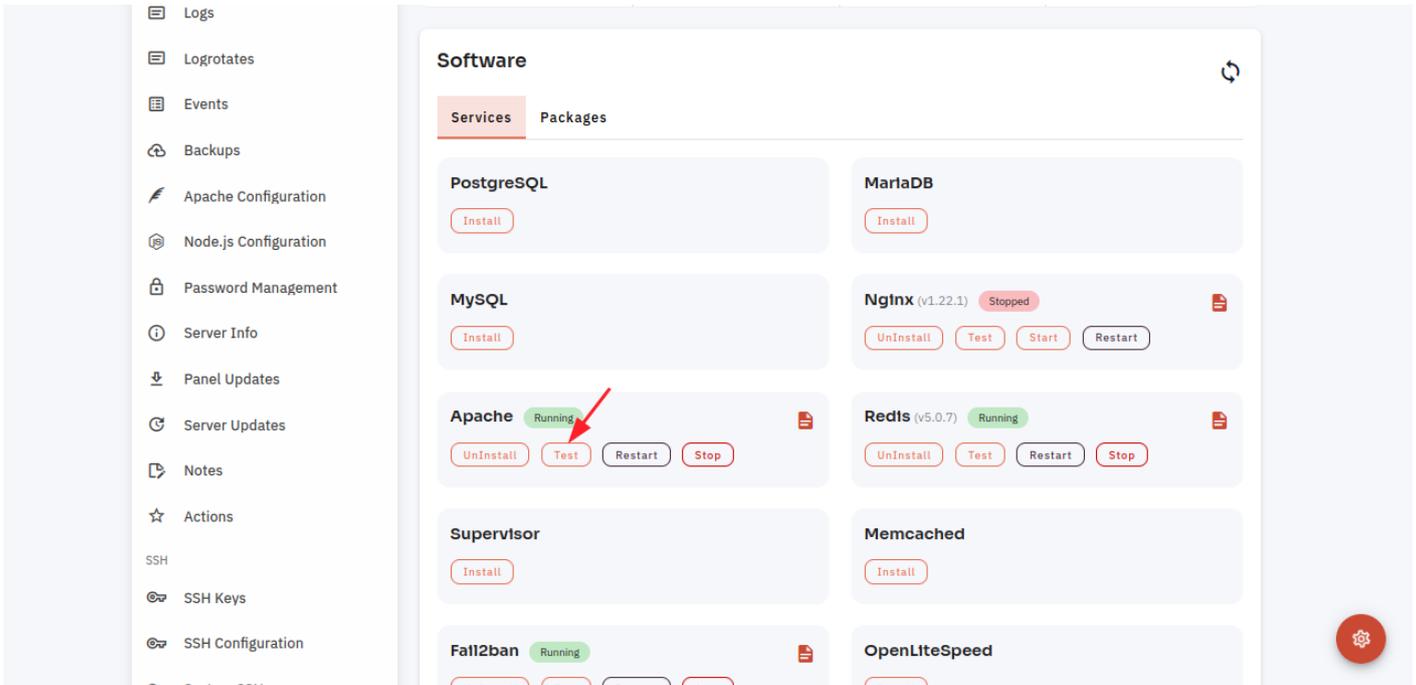


4. Open a dialog and click the "Text" button to test the Apache software.

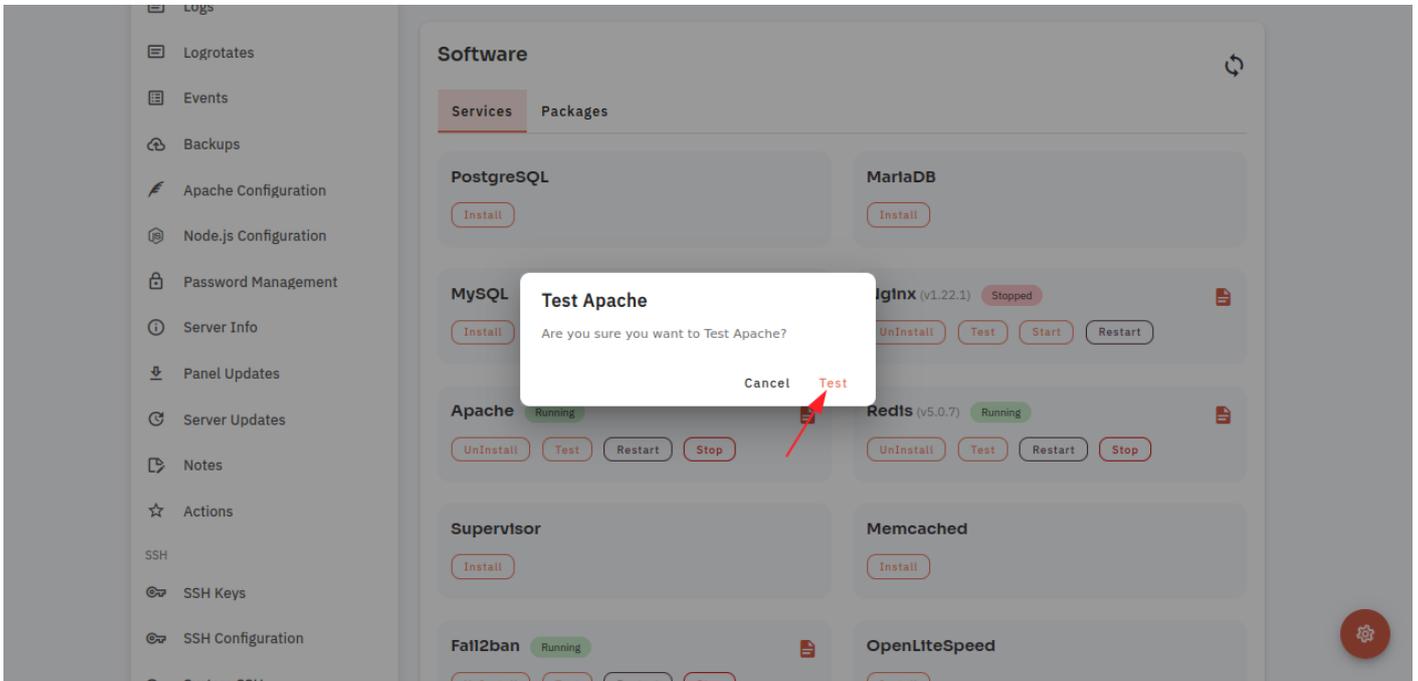


Here, you can see the Apache Test successfully.

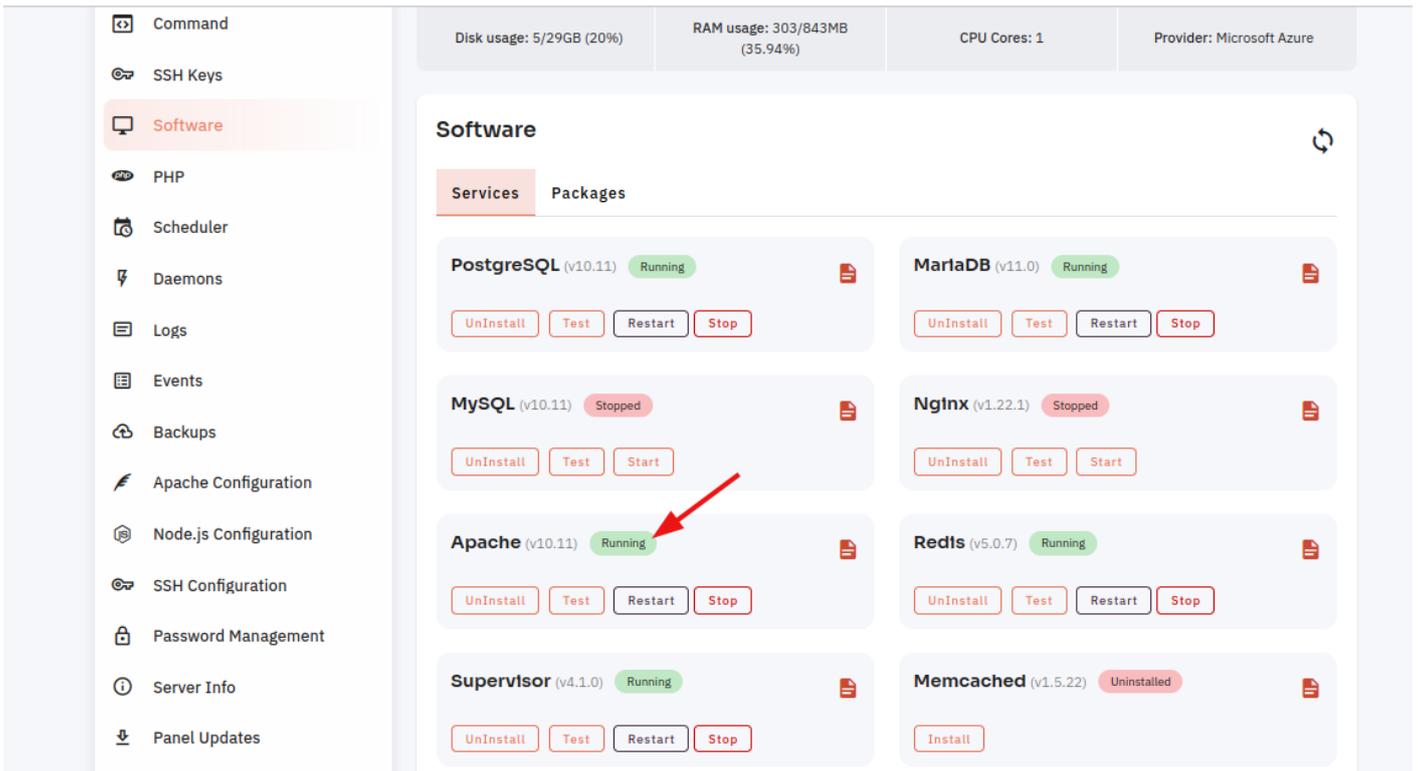


5. Select the Start option.

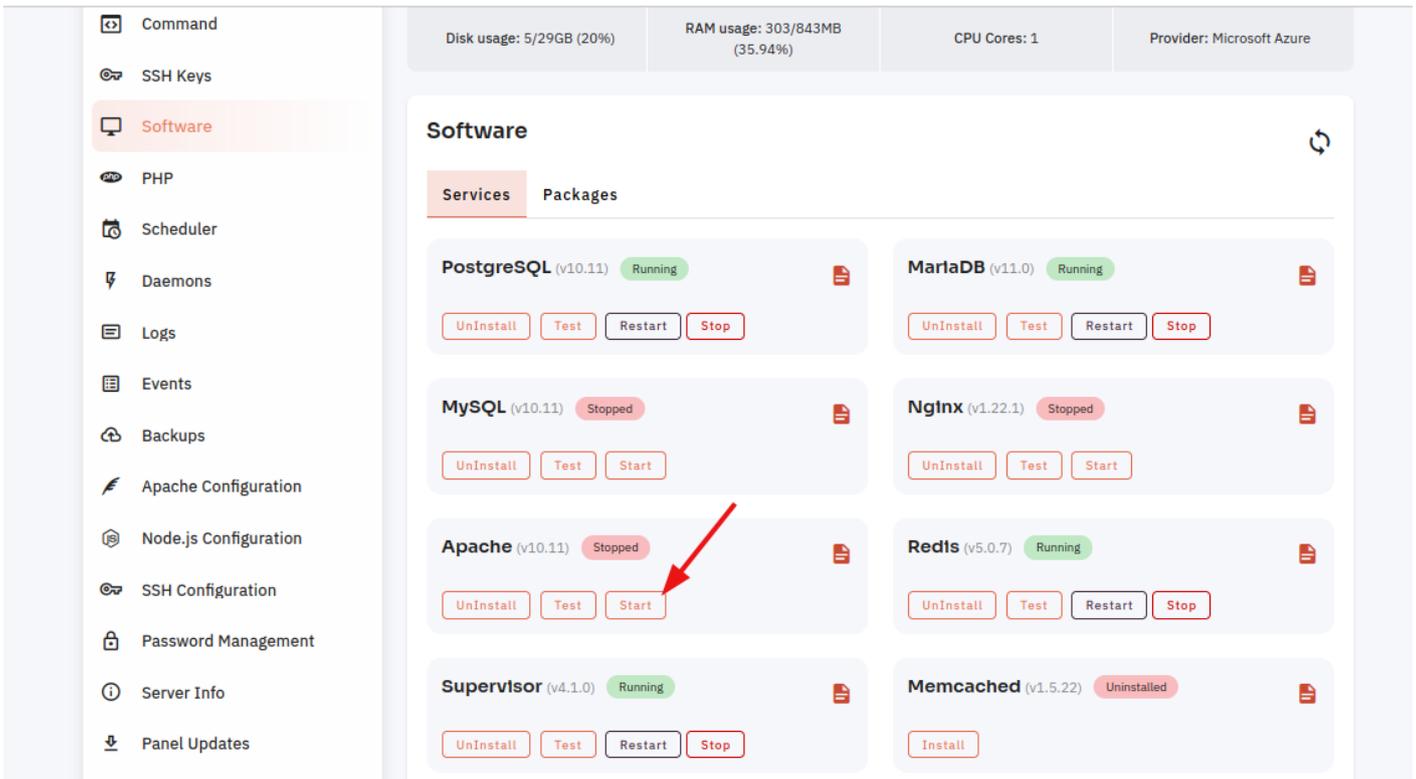


6. Open a Dialog and Click on the Start Button to start Apache software.

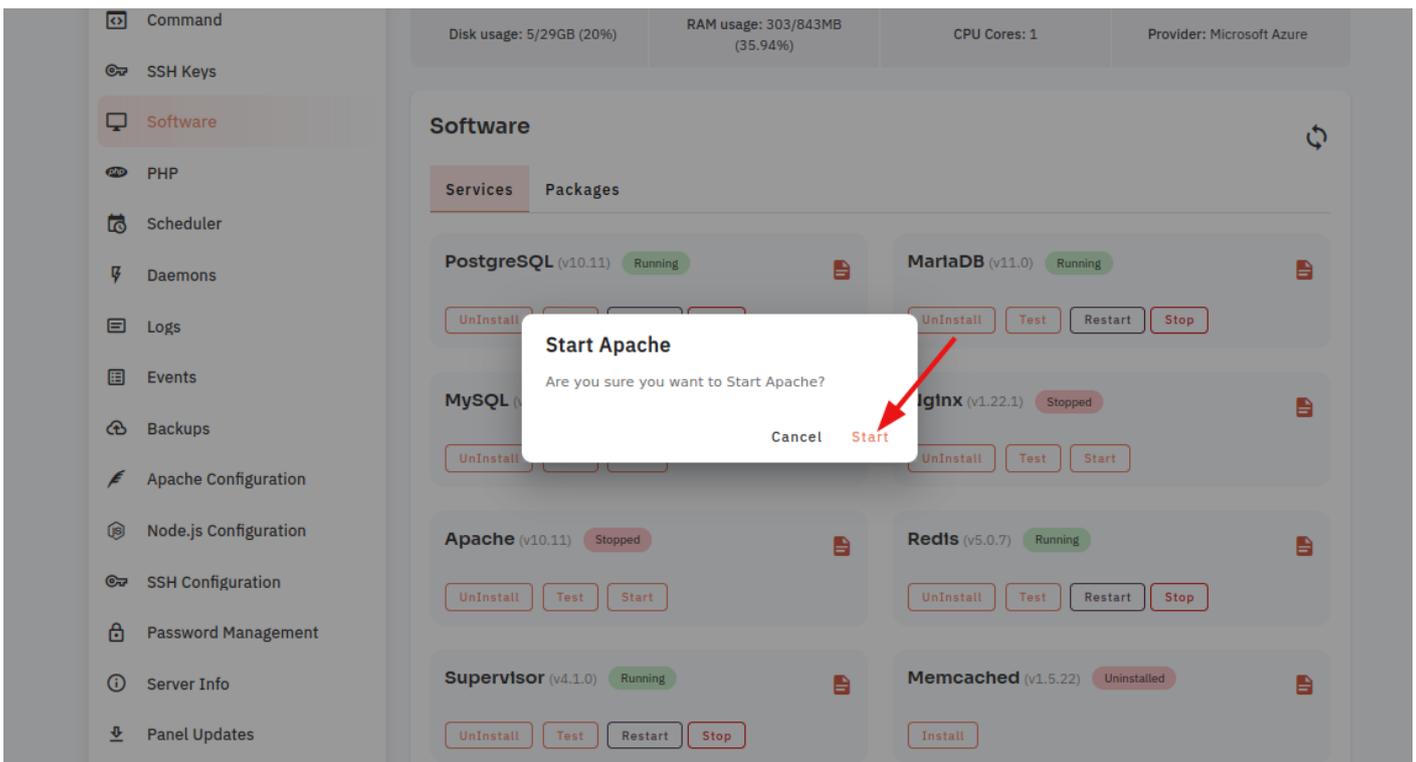


Here, you can see Apache Started successfully.

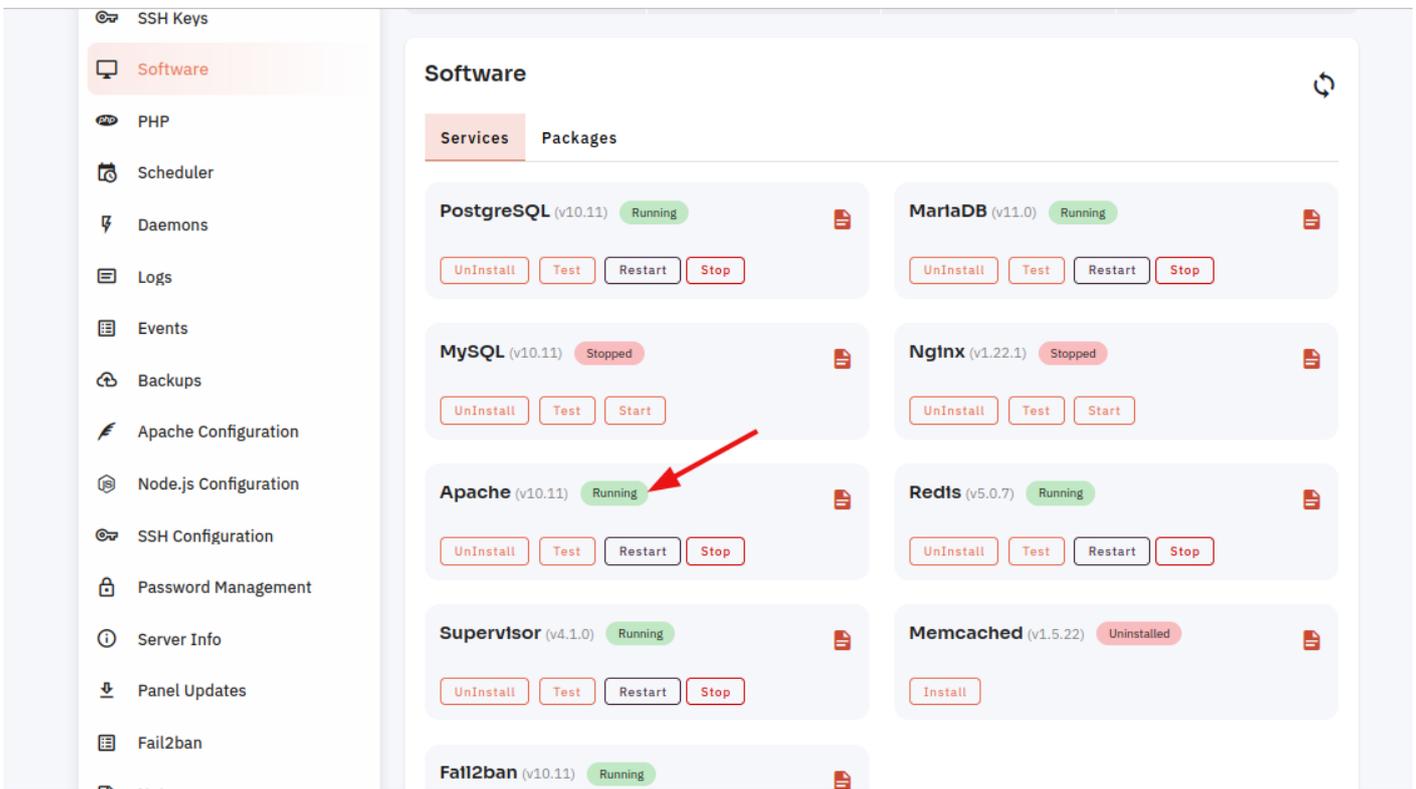


7. Select the Stop option.

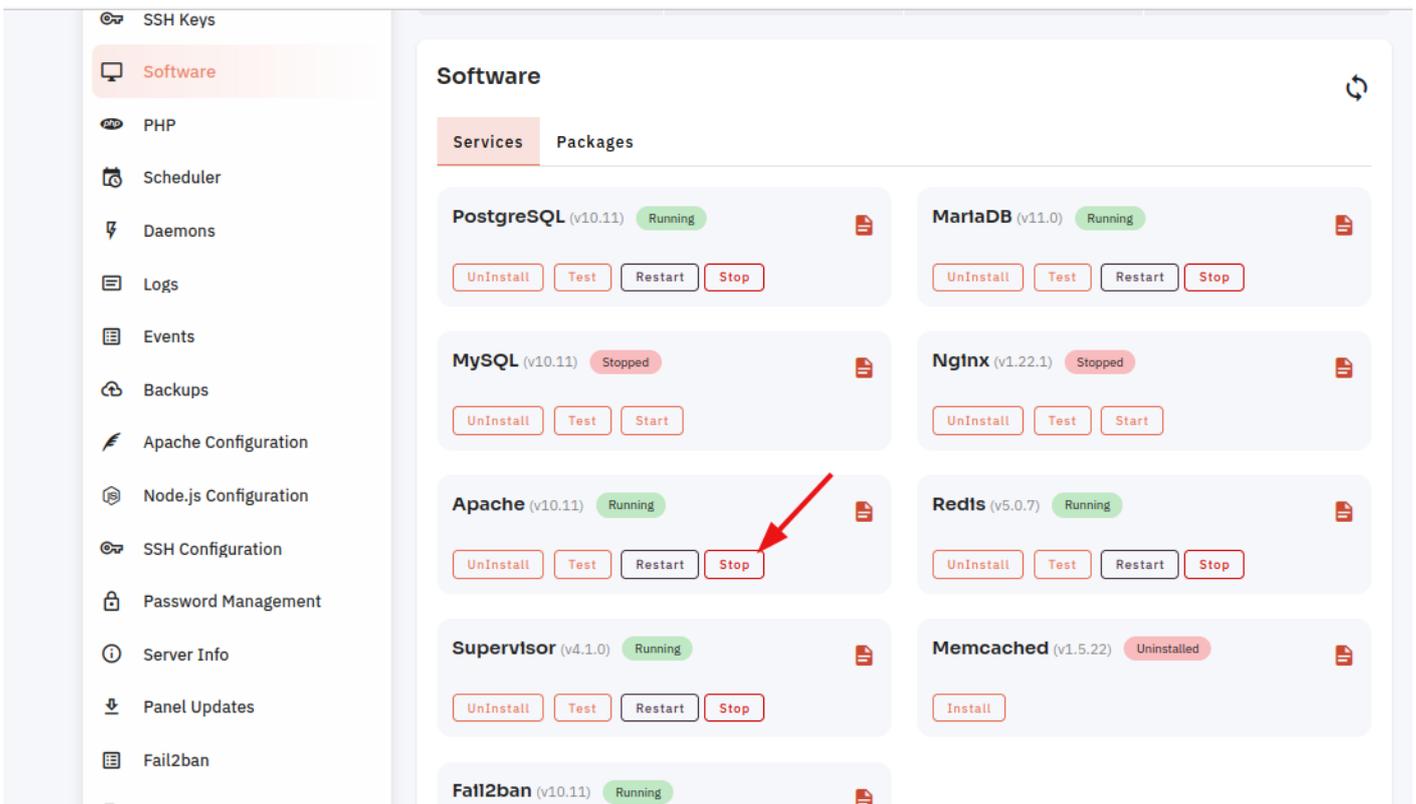


8. Open a dialog and click the stop button to stop the Apache software.

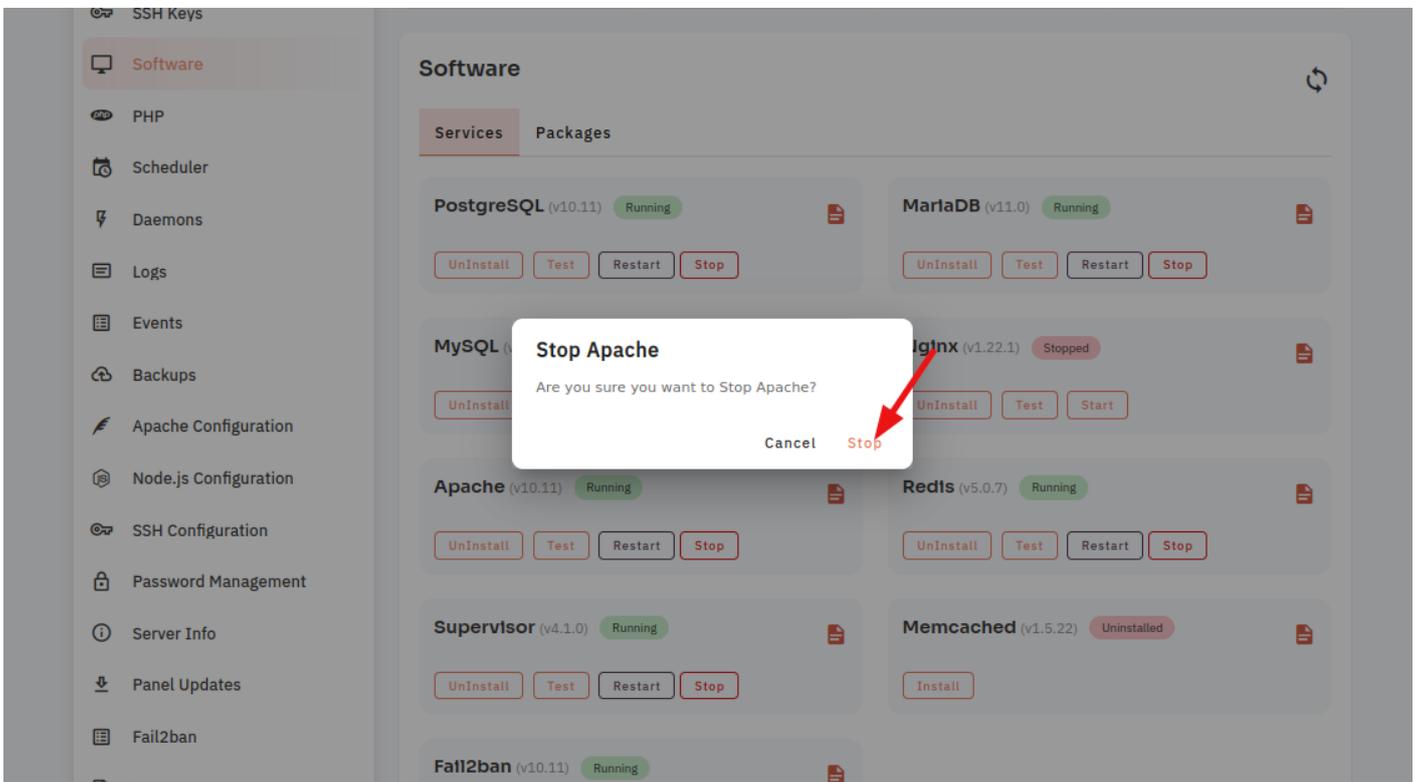


Here, you can see Apache Stopped successfully.

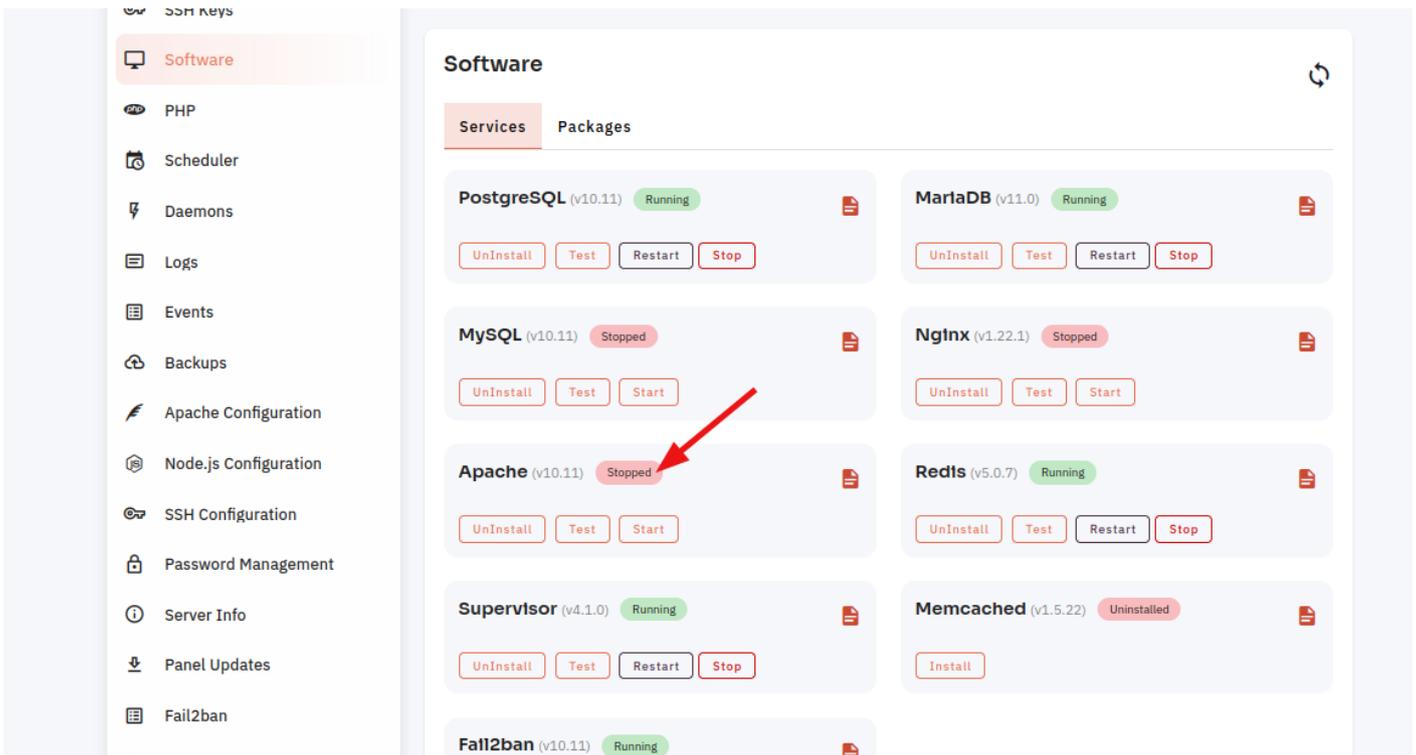


9. Select the Restart Option.

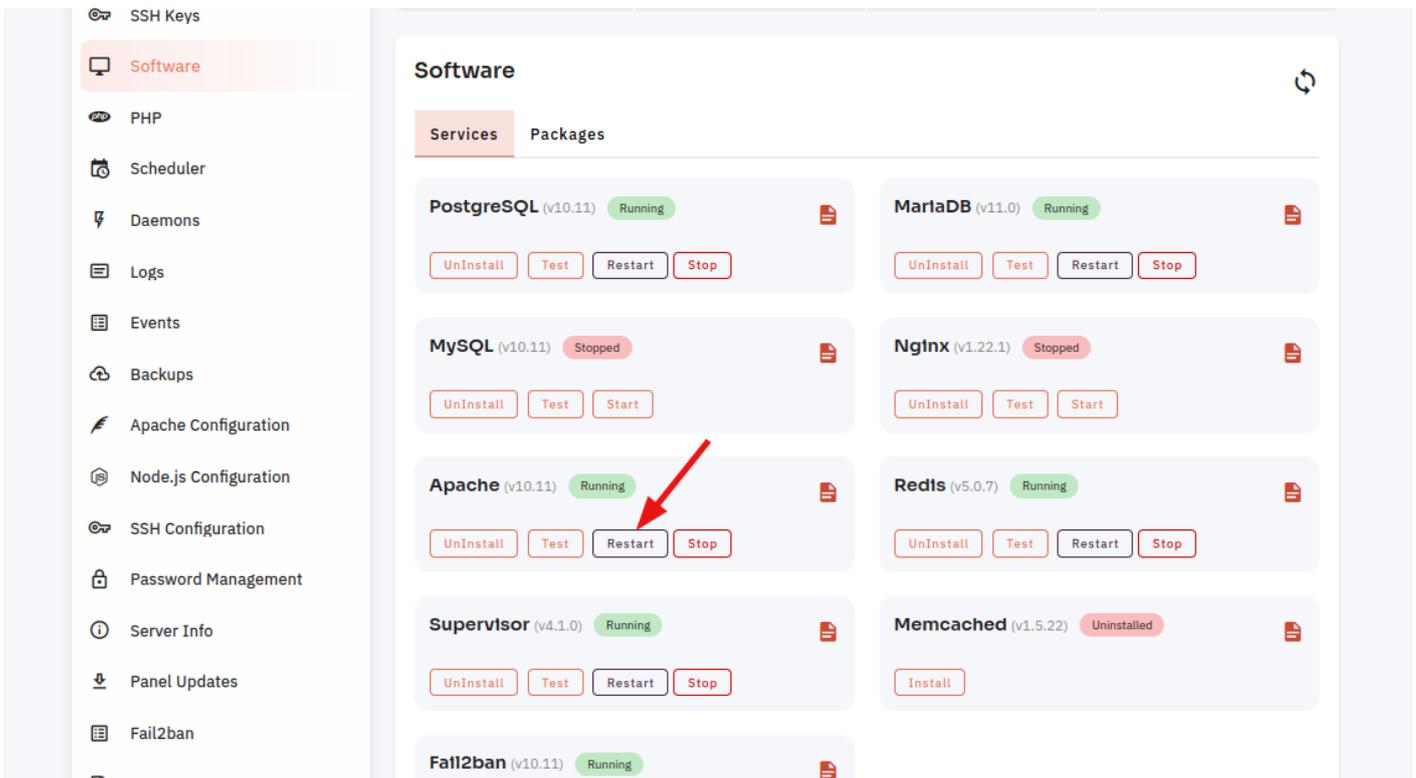


10. Open a dialog and click the restart button to restart the Apache software.

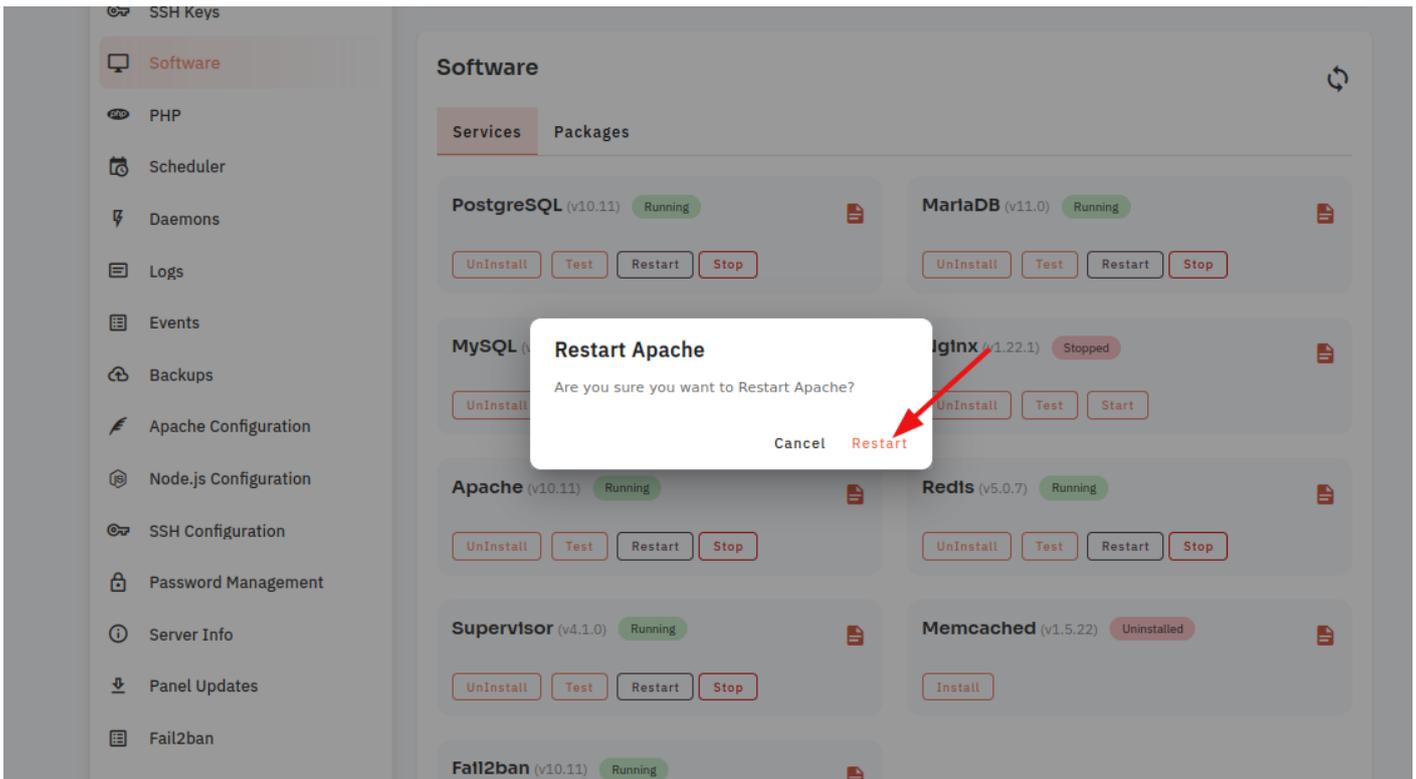


Here, you can see that Apache restarted successfully.

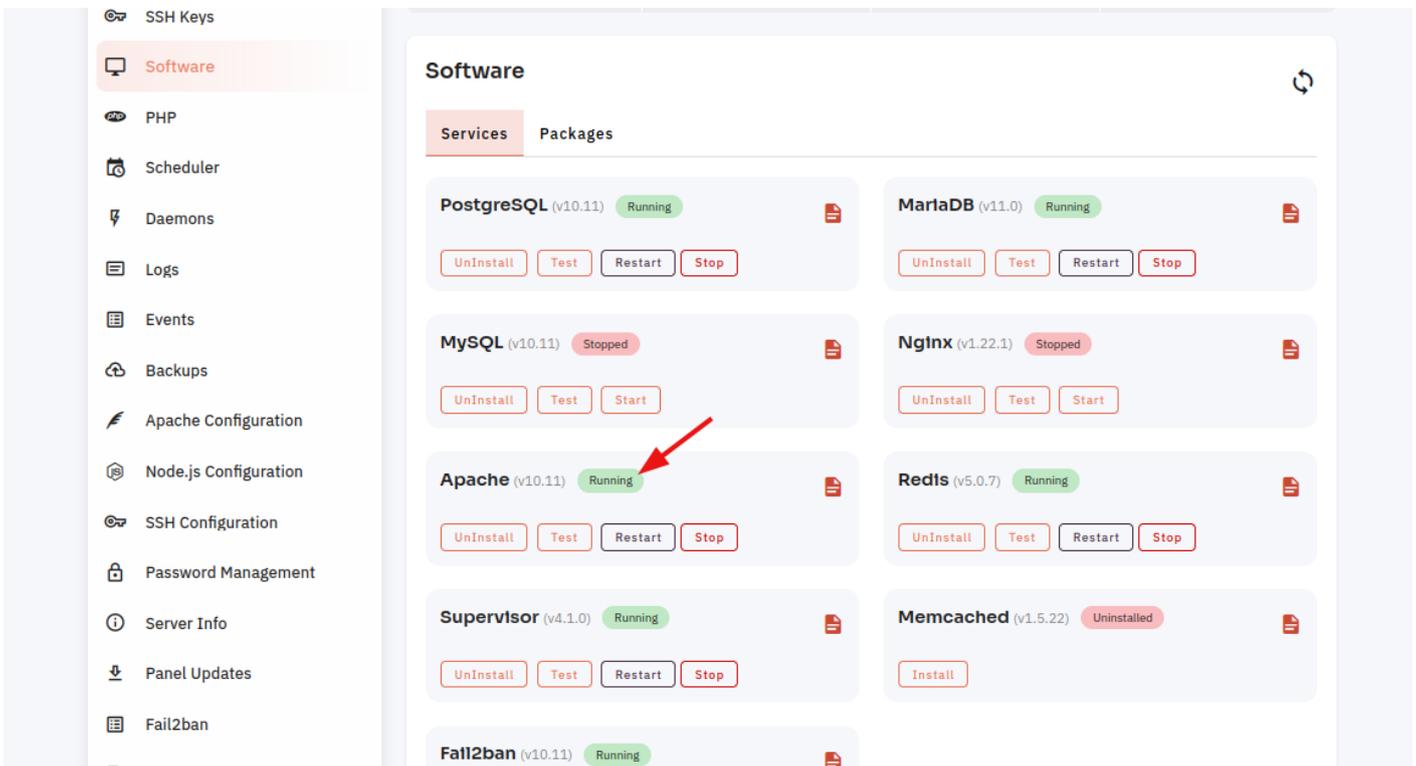


11. Click on the Event Button.

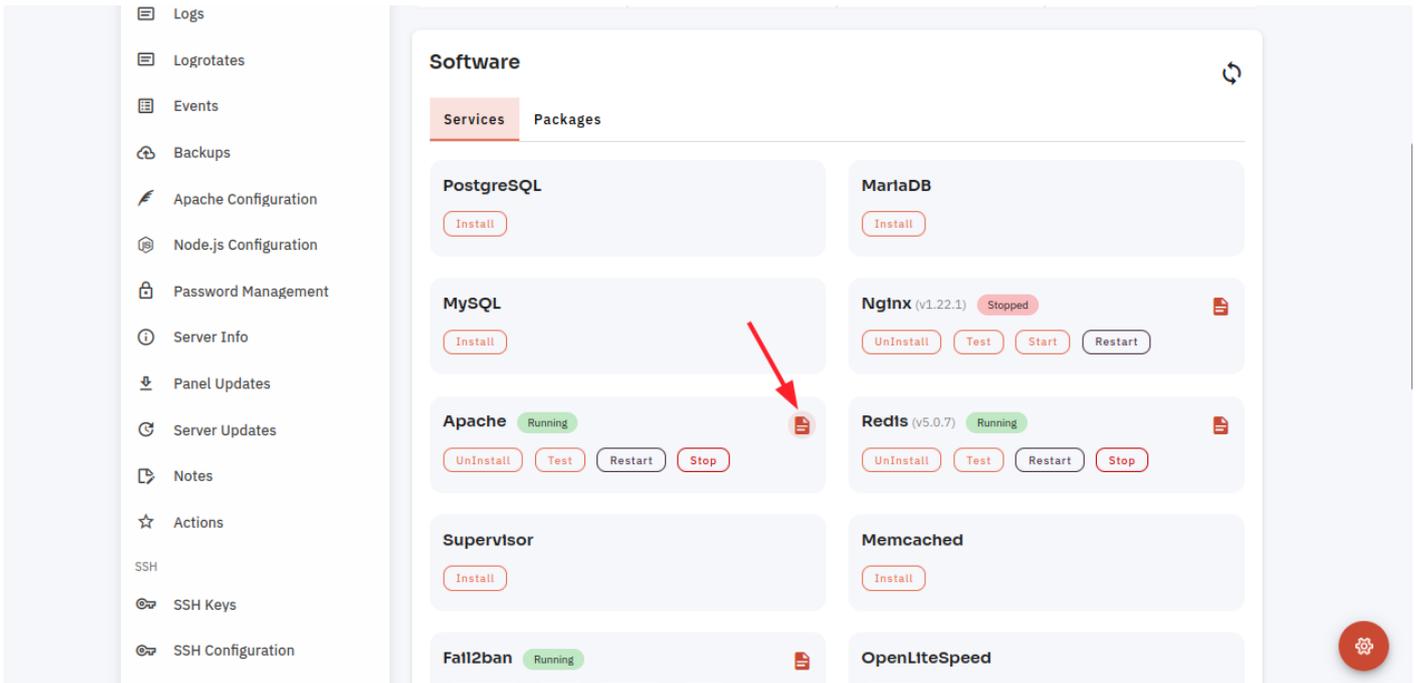


12. Click on the Eye icon.

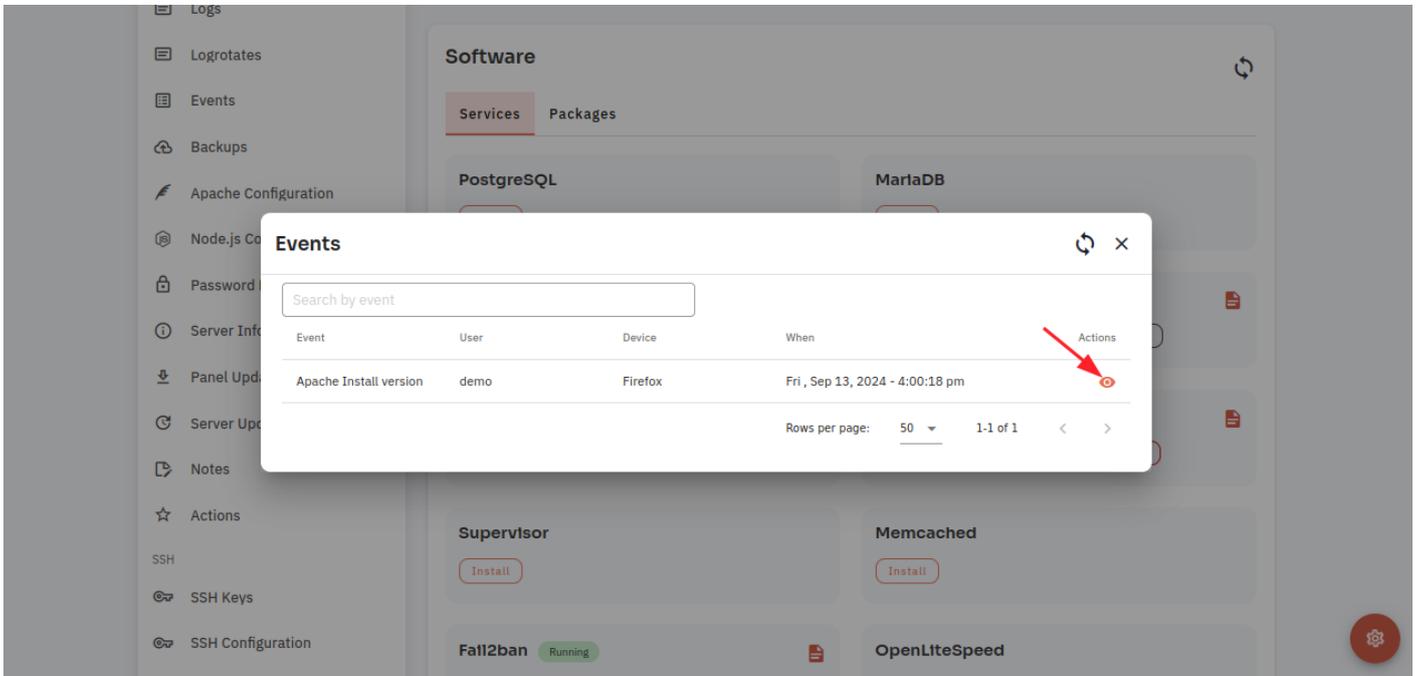

13. Click on the File icon.

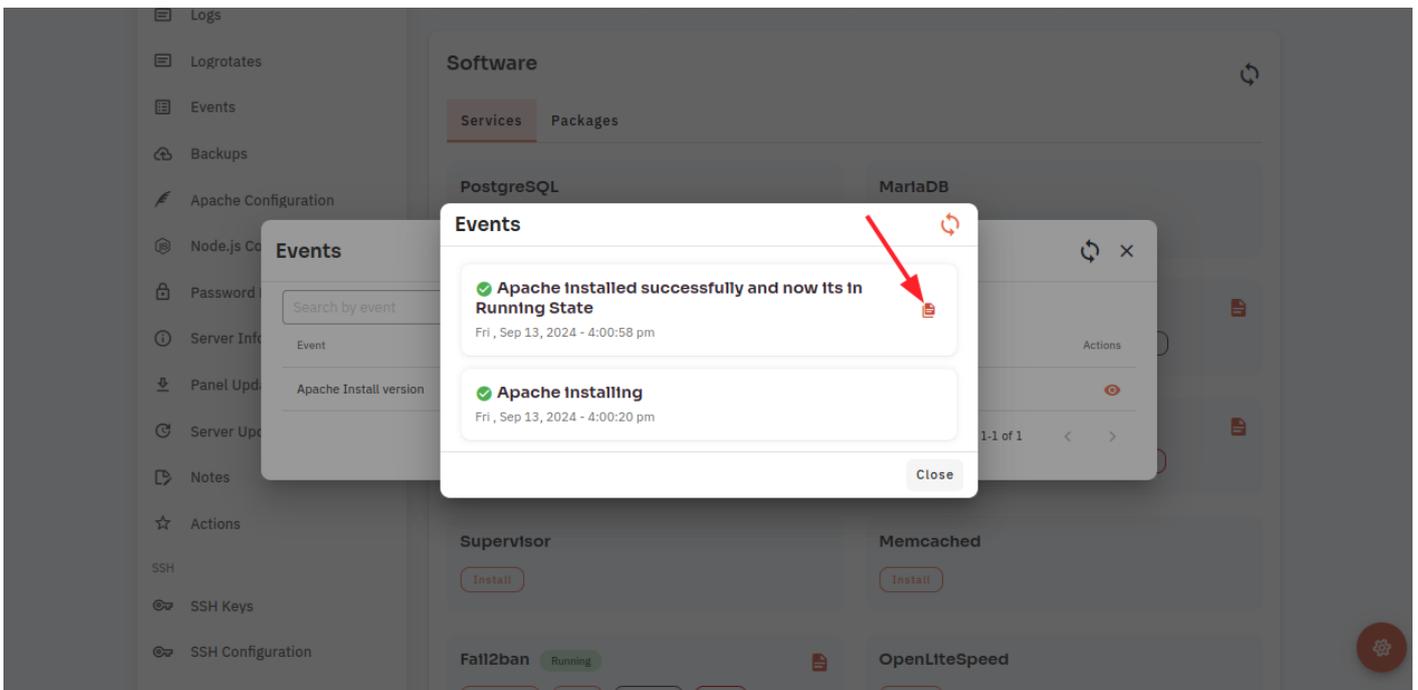

Here, you can see Apache Event data.

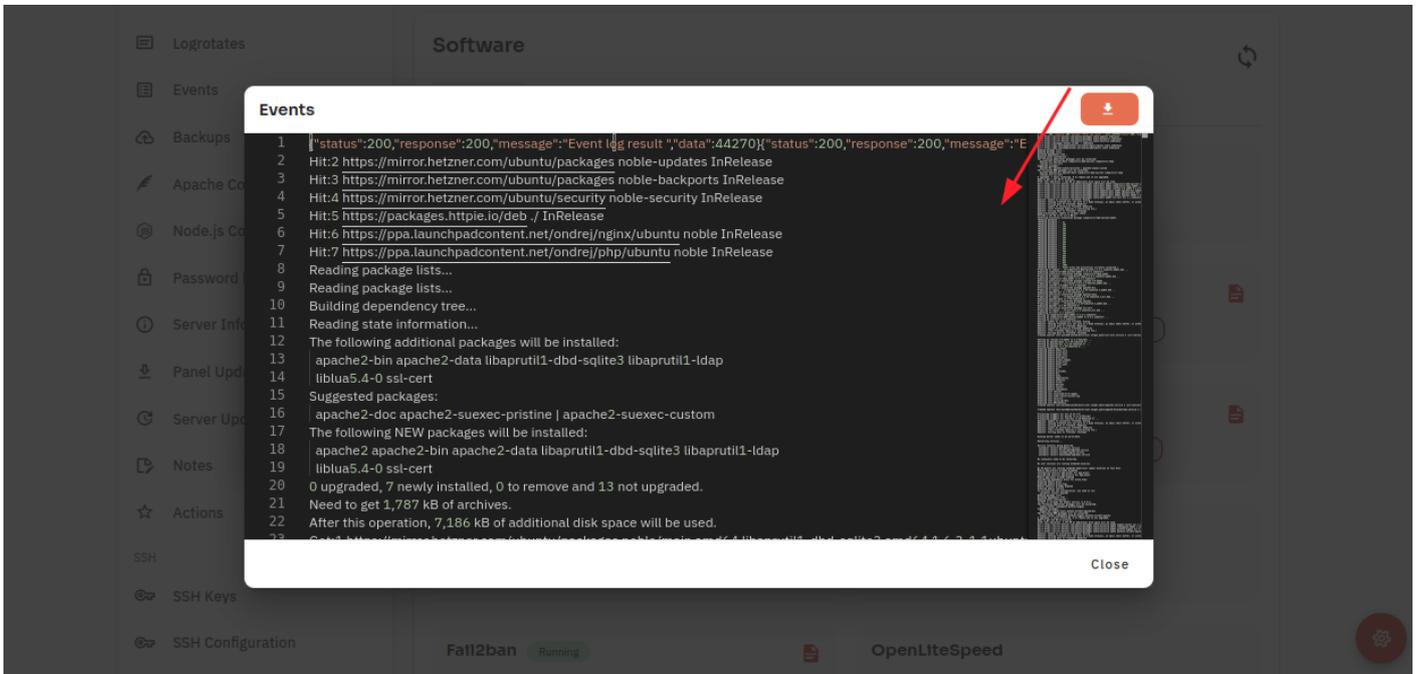

Revision #4

Created 30 August 2023 05:48:37 by Admin

Updated 13 September 2024 10:36:26 by Admin