

# How to Enable And Disable Development Mode?

<https://www.youtube.com/embed/98EM19oRt9E>


Development mode is a term that can refer to a variety of different things depending on the context in which it is used. In general, development mode refers to a state or configuration in which a system, device, or application is being developed, tested, or debugged.

Follow the steps below to Enable And Disable Development Mode.

**Navigate to the Setting (Use this link to view How to Navigate ).**

## Enable Development Mode :

Click on the switch button.

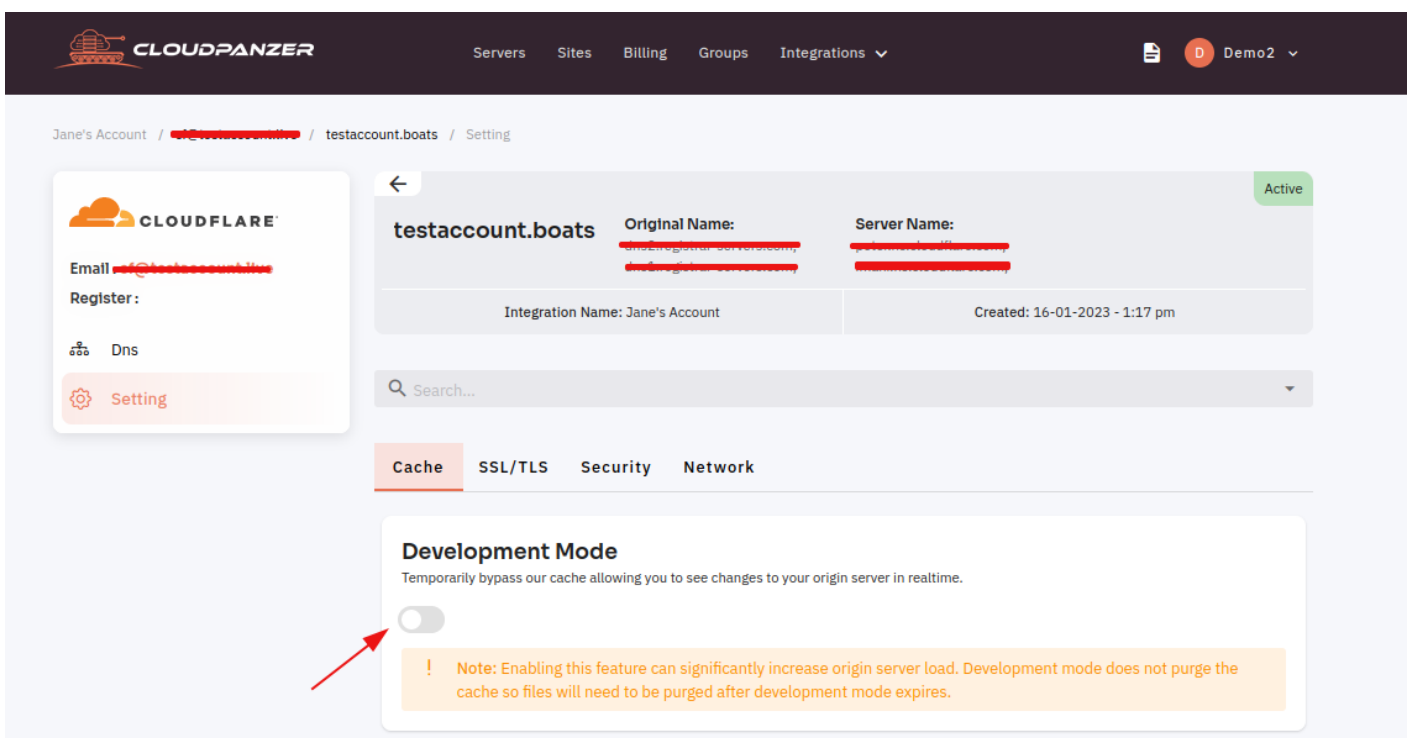


The screenshot displays the CloudPanzer dashboard interface. At the top, there is a navigation bar with the CloudPanzer logo and several menu items: Servers, Sites, Billing, Groups, and Integrations. A user profile icon and the text 'Demo2' are visible on the right. Below the navigation bar, the breadcrumb trail reads 'Jane's Account / testaccount.boats / Setting'. On the left side, there is a sidebar with the Cloudflare logo and links for 'Email', 'Register', 'Dns', and 'Setting'. The main content area shows the 'testaccount.boats' settings. It includes fields for 'Original Name' and 'Server Name', both of which are redacted. Below these fields, it shows 'Integration Name: Jane's Account' and 'Created: 16-01-2023 - 1:17 pm'. A search bar is present. At the bottom, there are tabs for 'Cache', 'SSL/TLS', 'Security', and 'Network'. The 'Cache' tab is selected, and within it, the 'Development Mode' section is visible. It contains a toggle switch that is currently turned off, with a red arrow pointing to it. A note below the toggle states: 'Note: Enabling this feature can significantly increase origin server load. Development mode does not purge the cache so files will need to be purged after development mode expires.'

Here, you can see Development Mode Enabled successfully.


The screenshot shows the Cloudflare dashboard for the account 'Jane's Account' and site 'testaccount.boats'. The left sidebar contains the Cloudflare logo, email address, and navigation links for 'Dns' and 'Setting'. The main content area shows the site details, including 'Original Name' and 'Server Name', both redacted. Below this is a search bar and tabs for 'Cache', 'SSL/TLS', 'Security', and 'Network'. The 'Cache' tab is selected, displaying the 'Development Mode' section. A red arrow points to the 'Development Mode' toggle switch, which is currently turned on. The text below the switch indicates 'After Development Mode Expires : 03:-1:54 seconds'. A note at the bottom states: 'Note: Enabling this feature can significantly increase origin server load. Development mode does not purge the cache so files will need to be purged after development mode expires.'

## Disable Development Mode :


Click on the switch button.

CLOUDPANZER

ServersSitesBillingGroupsIntegrations


Demo2


Jane's Account / testaccount.boats / Setting

CLOUDFLARE

Email: [redacted]

Register:

 Dns

 Setting

testaccount.boats

Original Name: [redacted]

Server Name: [redacted]

Integration Name: Jane's Account

Created: 16-01-2023 - 1:17 pm

Search...

CacheSSL/TLSSecurityNetwork

Development Mode

Temporarily bypass our cache allowing you to see changes to your origin server in realtime.


This setting was last changed 6 hours ago

☒ After Development Mode Expires : 03:-4:35 seconds


!

Note: Enabling this feature can significantly increase origin server load. Development mode does not purge the cache so files will need to be purged after development mode expires.


Here, you can see Development Mode Disable successfully.

CLOUDPANZER

ServersSitesBillingGroupsIntegrations


Demo2


Jane's Account / testaccount.boats / Setting

CLOUDFLARE

Email: [redacted]

Register:

 Dns

 Setting

testaccount.boats

Original Name: [redacted]

Server Name: [redacted]

Integration Name: Jane's Account

Created: 16-01-2023 - 1:17 pm

Search...

CacheSSL/TLSSecurityNetwork

Development Mode

Temporarily bypass our cache allowing you to see changes to your origin server in realtime.

☐

!

Note: Enabling this feature can significantly increase origin server load. Development mode does not purge the cache so files will need to be purged after development mode expires.

Looking for Mobile app Instructions?

Available at <https://kb.cloudpanzer.com/books/mobile-app/page/how-to-enable-and-disable-development-mode>

---

Revision #7

Created 27 December 2022 07:54:08 by Admin

Updated 2 September 2023 07:14:28 by Admin