


# How to Navigate Shell Aliases on Cloudpanzer?

Follow the steps below to navigate shell aliases:

1: Once logged in, look for a "Server" and click on it.

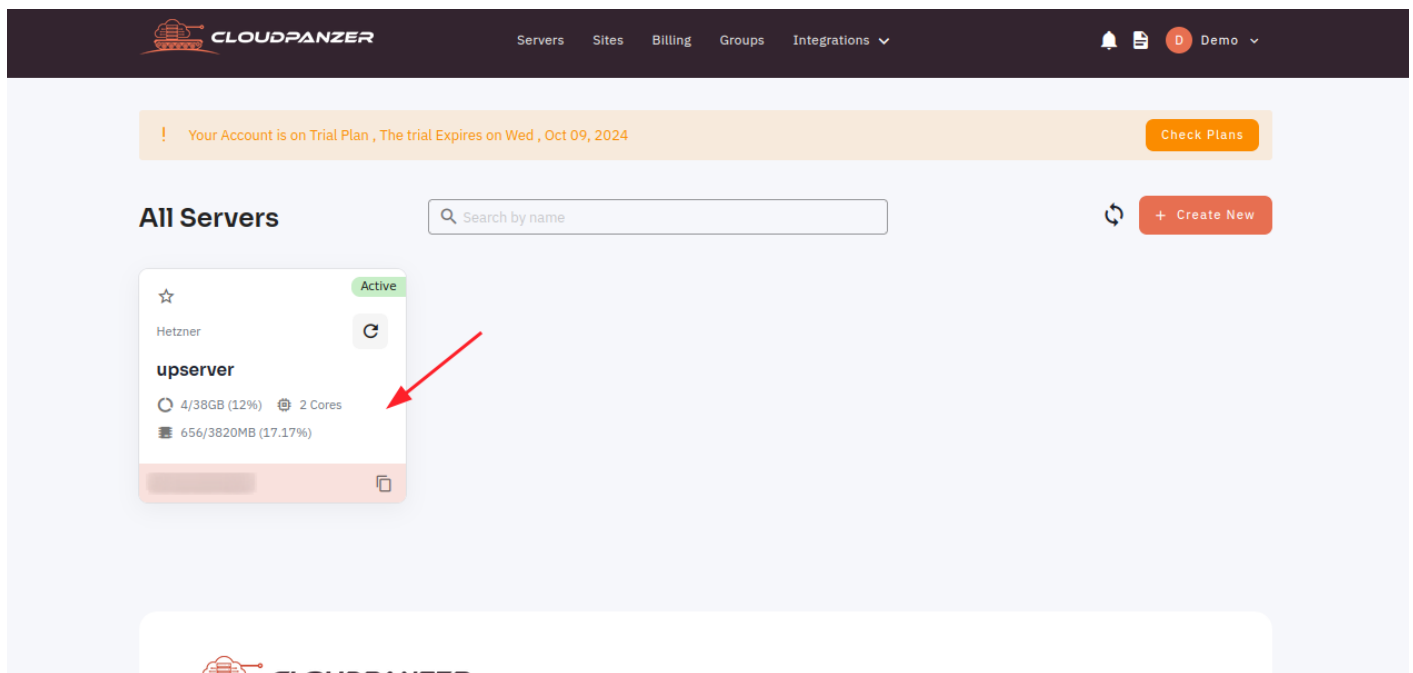

2: Click on the active site.

Cloudpanzer interface showing the **Sites** section selected in the sidebar. The main content area displays the **upserver** status and a table of **Active Sites**.

**upserver** status:

- Refresh Stats
- PostgreSQL
- Ngix
- Redis
- Supervisor
- 5 More
- Active

Server Mode: Nginx  
Uptime: Mon 9 Sep - 6 Days, 20 Hours, 4 Minutes 5 second

Stats last sync: Mon, Sep 16, 2024 - 3:57 am

Disk usage: 4/38GB (12%) | RAM usage: 656/3820MB (17.17%) | CPU Cores: 2 | Provider: Hetzner

**Active Sites**

Domain	App	PHP	Status	User	SSH	Isolated	Events
apple.testaccountboats		php8.2	Installed	appletestaccountboats	Yes	Yes	
newsite.testaccount.boats		php8.3	Installed	newsitetestaccountboats	Yes	Yes	

Rows per page: 10 | 1-2 of 2

3: Click on the Shell Settings.

Cloudpanzer interface showing the **Shell Settings** section selected in the sidebar. The main content area displays the **Shell Type** and **Shell Aliases** configuration.

**Shell Type**

- ☐ SH
- ☒ Bash
- ☐ Force Reset config files
- Save

**Shell Aliases**

File: /home/appletestaccountboats/.bash\_aliases

Key	Value	Status	Actions
No data available			

Rows per page: 10 | - | < | >

Revision #5

Created 29 May 2023 10:25:14 by Admin

Updated 16 September 2024 06:41:14 by Admin