


How to Navigate Shell Aliases on Cloudpanzer?

Follow the steps below to navigate shell aliases:

1: Once logged in, look for a "Server" and click on it.

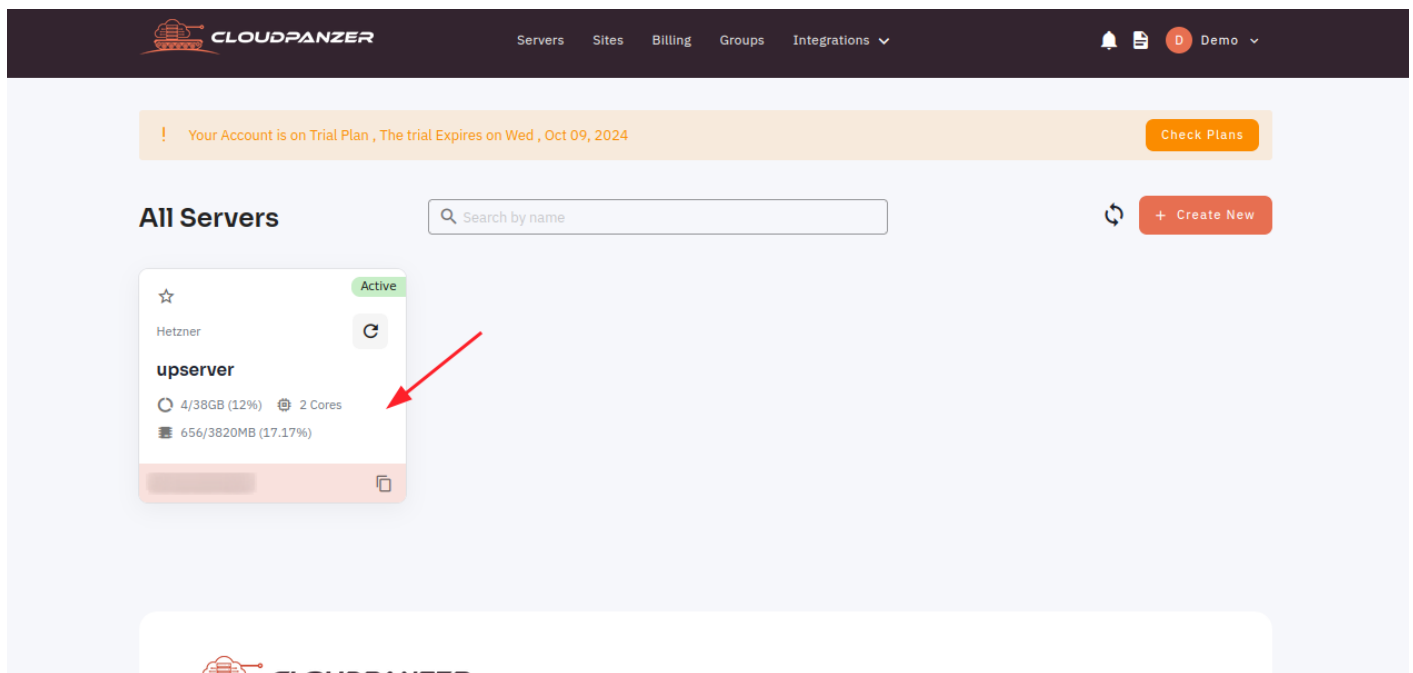

2: Click on the active site.

Cloudpanzer interface showing the 'Sites' section in the sidebar and the 'upserver' configuration page.

Sidebar:

- Search
- Sites**
- Database
- PHP
- Scheduler/Cron
- Logs
- Logrotates
- Events
- Backups
- Ngix Configuration
- Node.js Configuration
- Password Management

upserver Configuration:

- Refresh Stats
- PostgreSQL
- Ngix
- Redis
- Supervisor
- 5 More
- Active

upserver Details:

- Server Mode: Ngix
- Uptime: Mon 9 Sep - 6 Days, 20 Hours, 4 Minutes 5 second
- Stats last sync: Mon, Sep 16, 2024 - 3:57 am
- Disk usage: 4/38GB (12%)
- RAM usage: 656/3820MB (17.17%)
- CPU Cores: 2
- Provider: Hetzner

Active Sites:

Domain	App	PHP	Status	User	SSH	Isolated	Events
apple.testaccountboats		php8.2	Installed	appletestaccountboats	Yes	Yes	
newsite.testaccount.boats		php8.3	Installed	newsitetestaccountboats	Yes	Yes	

Rows per page: 10 | 1-2 of 2

3: Click on the Shell Settings.

Cloudpanzer interface showing the 'Shell Settings' section in the sidebar and the 'Shell Type' and 'Shell Aliases' configuration pages.

Sidebar:

- Logrotates
- PHP Configuration
- Ngix Configuration
- Node.js Configuration
- Password Management
- SSH
- SSH Keys
- Authorized SSH
- ADVANCED
- SSL
- Redirects
- Events
- Shell Settings**
- Site Meta
- Actions

Shell Type Configuration:

- Events
- ☐ SH ☒ Bash
- ☐ Force Reset config files
- Save

Shell Aliases Configuration:

- File: /home/appletestaccountboats/.bash_aliases
- Events
- Add New

Key	Value	Status	Actions
No data available			

Rows per page: 10 | - < >

Revision #5

Created 29 May 2023 10:25:14 by Admin

Updated 16 September 2024 06:41:14 by Admin