

# How to sites Enable/Disable Nginx Configuration ?


Follow the steps below to Enable/Disable Nginx Configuration

## Navigate to the Nginx Configuration

([Use this link to view How to Navigate](#)

### Enable :

4. Switch on to Enable Nginx Configuration.

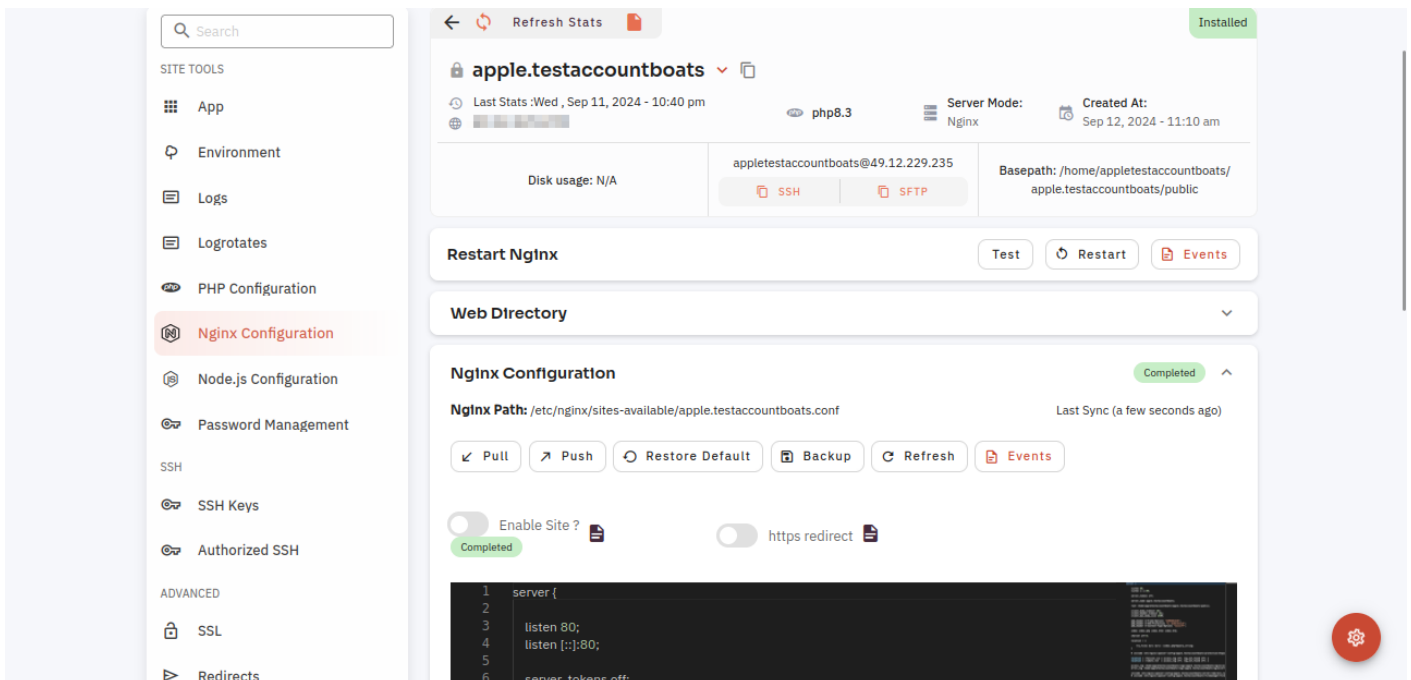

The screenshot displays the Nginx Configuration page for the site 'apple.testaccountboats'. The interface includes a sidebar with navigation options like 'App', 'Environment', 'Logs', 'Logrotates', 'PHP Configuration', 'Nginx Configuration' (highlighted), 'Node.js Configuration', 'Password Management', 'SSH', 'SSH Keys', 'Authorized SSH', 'ADVANCED', 'SSL', and 'Redirects'. The main content area shows site details: 'Last Stats :Wed , Sep 11, 2024 - 10:40 pm', 'php8.3', 'Server Mode: Nginx', and 'Created At: Sep 12, 2024 - 11:10 am'. It also displays 'Disk usage: N/A', 'apple.testaccountboats@49.12.229.235', and 'Basepath: /home/apple.testaccountboats/apple.testaccountboats/public'. Below this, there are buttons for 'Restart Nginx' (Test, Restart, Events) and 'Web Directory'. The 'Nginx Configuration' section shows the path '/etc/nginx/sites-available/apple.testaccountboats.conf' and a 'Last Sync (a few seconds ago)' status. It includes buttons for 'Pull', 'Push', 'Restore Default', 'Backup', 'Refresh', and 'Events'. There are two toggle switches: 'Enable Site ?' (set to 'Completed') and 'https redirect' (disabled). At the bottom, a code editor shows the Nginx configuration file content:

```
1 server {
2
3     listen 80;
4     listen [::]:80;
5
6     server_tokens off;
```

5. Here you can see Enabled Nginx Config are successful.

Search

SITE TOOLS

- App
- Environment
- Logs
- Logrotates
- PHP Configuration
- Nginx Configuration**
- Node.js Configuration
- Password Management

SSH

- SSH Keys
- Authorized SSH

ADVANCED

- SSL
- Redirects

Refresh Stats

Installed

**apple.testaccountboats**

Last Stats: Wed, Sep 11, 2024 - 10:40 pm

php8.3

Server Mode: Nginx

Created At: Sep 12, 2024 - 11:10 am

Disk usage: N/A

appletestaccountboats@49.12.229.235

Basepath: /home/appletestaccountboats/apple.testaccountboats/public

SSH SFTP

Restart Nginx

Test Restart Events

Web Directory

**Nginx Configuration**

Completed

Nginx Path: /etc/nginx/sites-available/apple.testaccountboats.conf

Last Sync (a few seconds ago)

Pull Push Restore Default Backup Refresh Events

Enable Site ? ☒ https redirect

Completed

Request Submitted, This will take a few seconds to process

```
1 server {
2
3     listen 80;
4     listen [::]:80;
5
6     server_tokens off;
```

## Disable :

1. Switch off to Disabled Nginx Config.

Search

SITE TOOLS

- App
- Environment
- Logs
- Logrotates
- PHP Configuration
- Nginx Configuration**
- Node.js Configuration
- Password Management

SSH

- SSH Keys
- Authorized SSH

ADVANCED

- SSL
- Redirects

Refresh Stats

Installed

**apple.testaccountboats**

Last Stats: Wed, Sep 11, 2024 - 10:40 pm

49.12.229.235

php8.3

Server Mode: Nginx

Created At: Sep 12, 2024 - 11:10 am

Disk usage: N/A

appletestaccountboats@49.12.229.235

Basepath: /home/appletestaccountboats/apple.testaccountboats/public

SSH SFTP

Restart Nginx

Test Restart Events

Web Directory

**Nginx Configuration**

Completed

Nginx Path: /etc/nginx/sites-available/apple.testaccountboats.conf

Last Sync (a few seconds ago)


Pull Push Restore Default Backup Refresh Events

Enable Site ? ☐ https redirect

Completed

```
1 server {
2
3     listen 80;
4     listen [::]:80;
5
6     server_tokens off;
```

2. Here you can see Disable Nginx config is successful.

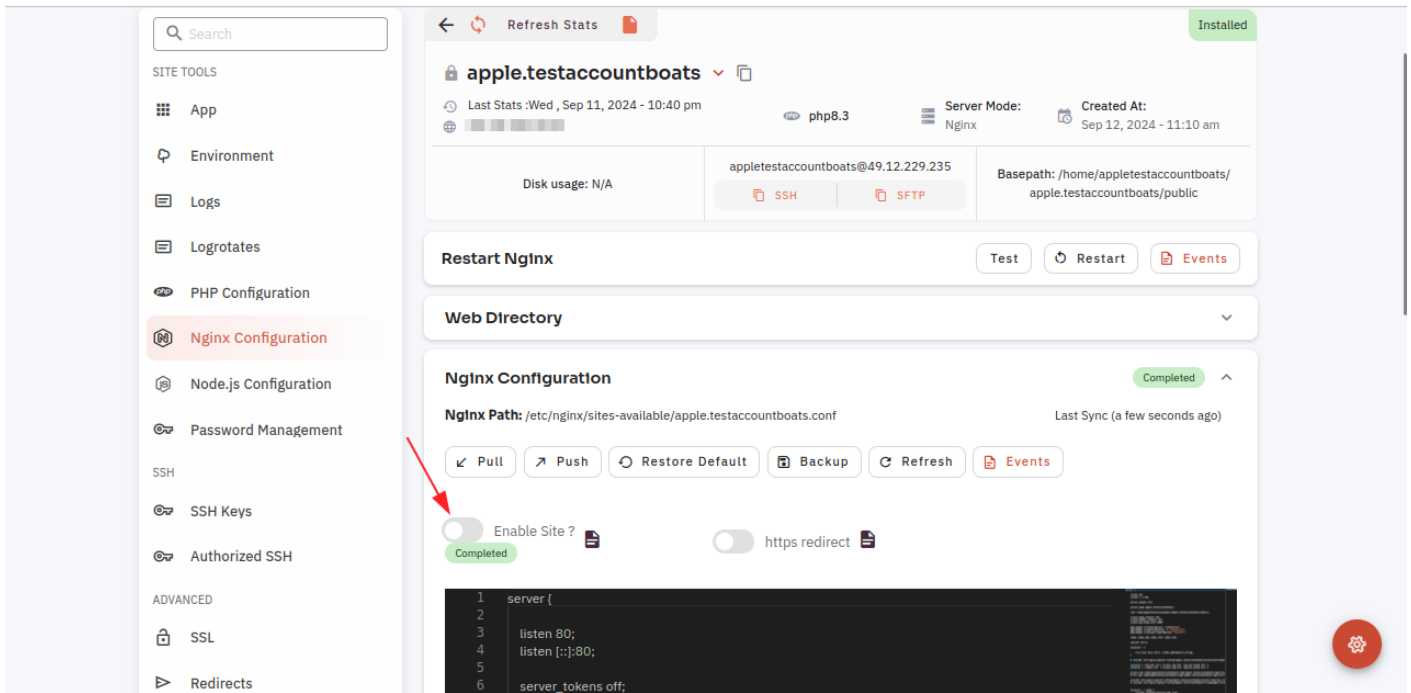

Looking for Mobile App Instructions?

Available at <https://kb.cloudpanzer.com/books/mobile-app/page/how-to-sites-enabledisable-nginx-configuration>

Revision #5

Created 31 May 2023 07:36:40 by Admin

Updated 12 September 2024 10:08:16 by Admin