

How to sites Enable/Disable Nginx Configuration ?


Follow the steps below to Enable/Disable Nginx Configuration

Navigate to the Nginx Configuration

(Use this link to view How to Navigate

Enable :

4. Switch on to Enable Nginx Configuration.

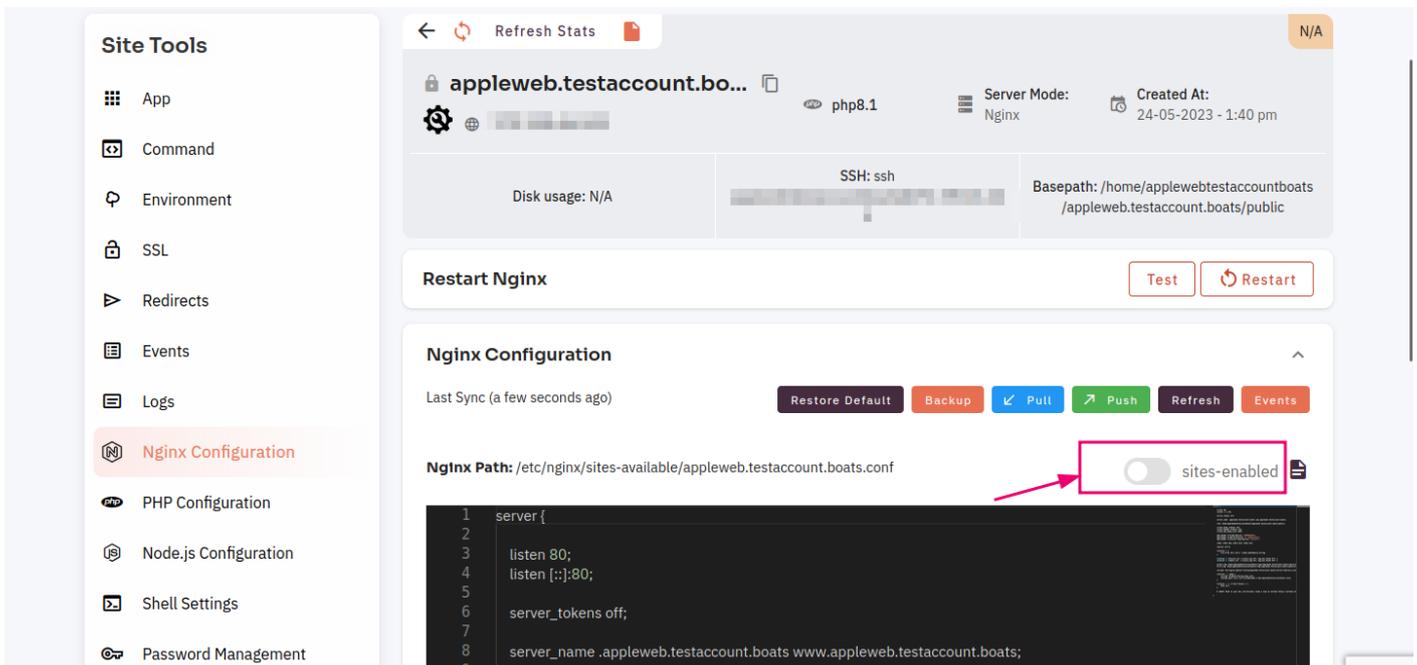

The screenshot displays the Nginx Configuration interface. On the left, a sidebar lists various site tools, with 'Nginx Configuration' highlighted. The main panel shows the site 'appleweb.testaccount.bo...' with details like 'php8.1', 'Server Mode: Nginx', and 'Created At: 24-05-2023 - 1:40 pm'. Below this, there are buttons for 'Restart Nginx' (Test, Restart) and 'Nginx Configuration' (Restore Default, Backup, Pull, Push, Refresh, Events). The 'Nginx Path' is shown as '/etc/nginx/sites-available/appleweb.testaccount.boats.conf'. A red box highlights the 'sites-enabled' toggle switch, which is currently turned off. A red arrow points to the toggle. Below the toggle, a code editor shows the Nginx configuration file content:

```
1 server {
2
3   listen 80;
4   listen [::]:80;
5
6   server_tokens off;
7
8   server_name .appleweb.testaccount.boats www.appleweb.testaccount.boats;
9
```

5. Here you can see Enabled Nginx Config are successful.

The screenshot shows the 'Nginx Configuration' section in the Site Tools interface. The site is 'appleweb.testaccount.bo...'. The configuration path is '/etc/nginx/sites-available/appleweb.testaccount.boats.conf'. The 'sites-enabled' toggle is currently turned on (indicated by a red dot), and the status is 'Completed'. A pink arrow points to the toggle. Below the toggle, there is a code editor showing the Nginx configuration file content:

```
1 listen 80;  
2  
3  
4 listen [::]:80;  
5  
6 server_tokens off;  
7  
8 server_name .appleweb.testaccount.boats www.appleweb.testaccount.boats;  
9
```

Disable :

1. Switch off to Disabled Nginx Config.

The screenshot shows the 'Nginx Configuration' section in the Site Tools interface. The site is 'appleweb.testaccount.bo...'. The configuration path is '/etc/nginx/sites-available/appleweb.testaccount.boats.conf'. The 'sites-enabled' toggle is now turned off (indicated by a grey dot), and the status is 'Completed'. A pink arrow points to the toggle. Below the toggle, there is a code editor showing the Nginx configuration file content:

```
1 listen 80;  
2  
3  
4 listen [::]:80;  
5  
6 server_tokens off;  
7  
8 server_name .appleweb.testaccount.boats www.appleweb.testaccount.boats;  
9
```

2. Here you can see Disable Nginx config are successfully.

Site Tools

- App
- Command
- Environment
- SSL
- Redirects
- Events
- Logs
- Nginx Configuration**
- PHP Configuration
- Node.js Configuration
- Shell Settings
- Password Management

Refresh Stats

appleweb.testaccount.bo... php8.1 Server Mode: Nginx Created At: 24-05-2023 - 1:40 pm

Disk usage: N/A SSH: ssh Basepath: /home/applewebtestaccountboats /appleweb.testaccount.boats/public

Restart Nginx Test Restart

Nginx Configuration

Last Sync (a few seconds ago) Restore Default Backup Pull Push Refresh Events

Nginx Path: /etc/nginx/sites-available/appleweb.testaccount.boats.conf sites-enabled

```
1 server {
2
3   listen 80;
4   listen [::]:80;
5
6   server_tokens off;
7
8   server_name .appleweb.testaccount.boats www.appleweb.testaccount.boats;
9 }
```

Looking for Mobile App Instructions?

Available at <https://kb.cloudpanzer.com/books/mobile-app/page/how-to-sites-enabledisable-nginx-configuration>

Revision #4

Created 31 May 2023 07:36:40 by Admin

Updated 2 September 2023 10:49:04 by Admin